



Country approval pictograms

IEC/EN 61009-1




PB104495-35



- Combined with iC60 circuit breaker, the Vigi iC60 provide:
 - protection of persons against electric shock by direct contact (≤ 30 mA),
 - protection of persons against electric shock by indirect contact (≥ 100 mA),
 - protection of installations against the risk of fire (300 mA or 500 mA).

Catalogue numbers

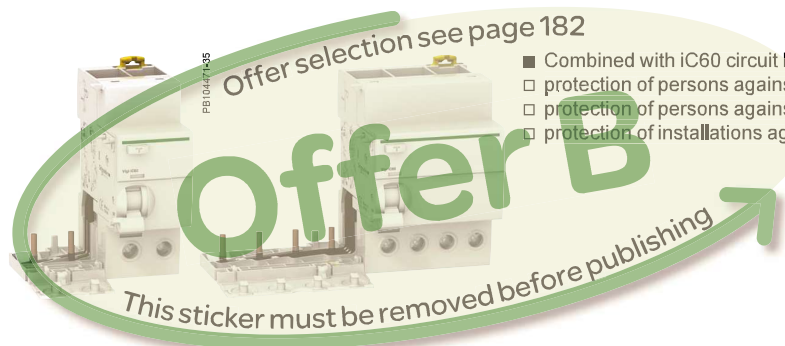
Vigi iC60 add-on residual current devices

Type	AC 									Width in 9 mm modules
Product	Vigi iC60									
Auxiliaries	Without auxiliaries									
2P	Sensitivity	10 mA	30 mA	100 mA	300 mA	500 mA	300 mA 	1000 mA 		
	Rating	25 A	A9V10225	A9V41225 A9V01225*	A9V12225	A9V44225 A9V04225*	A9V16225	-	-	3
		40 A	-	A9V41240 A9V01240*	-	A9V44240 A9V04240*	A9V16240	-	-	4
		63 A	-	A9V41263 A9V01263*	A9V12263	A9V44263 A9V04263*	A9V16263	A9V15263	A9V19263	4
3P	Sensitivity	10 mA	30 mA	100 mA	300 mA	500 mA	300 mA 	1000 mA 		
	Rating	25 A	-	A9V41325	-	A9V44325	A9V16325	-	-	6
		40 A	-	A9V41340	-	A9V44340	A9V16340	-	-	7
		63 A	-	A9V41363	-	A9V44363	A9V16363	A9V15363	A9V19363	7
4P	Sensitivity	10 mA	30 mA	100 mA	300 mA	500 mA	300 mA 	1000 mA 		
	Rating	25 A	-	A9V41425	A9V12425	A9V44425	A9V16425	-	-	6
		40 A	-	A9V41440	-	A9V44440	A9V16440	-	-	7
		63 A	-	A9V41463	A9V12463	A9V44463	A9V16463	A9V15463	A9V19463	7
Voltage rating (Ue)		230 - 240 V, 400 - 415 V Except * 130 V								
Operating frequency		50/60 Hz								
Accessories		Module CA907000								






IEC/EN 61009-1

PB104465-35



- Combined with iC60 circuit breaker, the Vigi iC60 provide:
 - protection of persons against electric shock by direct contact (30 mA),
 - protection of persons against electric shock by indirect contact (≥ 100 mA),
 - protection of installations against the risk of fire (300 mA or 500 mA).

Catalogue numbers

Vigi iC60 add-on residual current devices									
Type	A 							Width in 9 mm modules	
Product	Vigi iC60								
Auxiliaries	Without auxiliaries								
2P	Sensitivity	30 mA	100 mA	300 mA	500 mA	300 mA 	1000 mA 		
	Rating	25 A	A9V51225	A9V22225	A9V54225	A9V26225	-	-	3
		63 A	A9V51263	A9V22263	A9V54263	A9V26263	A9V25263	A9V29263	4
3P	Sensitivity	30 mA	100 mA	300 mA	500 mA	300 mA 	1000 mA 		
	Rating	25 A	A9V51325	A9V22325	A9V54325	A9V26325	-	-	6
		63 A	A9V51363	-	A9V54363	A9V26363	A9V25363	A9V29363	7
4P	Sensitivity	30 mA	100 mA	300 mA	500 mA	300 mA 	1000 mA 		
	Rating	25 A	A9V51425	A9V22425	A9V54425	A9V26425	-	-	6
		63 A	A9V51463	A9V22463	A9V54463	A9V26463	A9V25463	A9V29463	7
Voltage rating (Ue)		230 - 240 V, 400 - 415 V							
Operating frequency		50/60 Hz							
Accessories		Module CA907000							

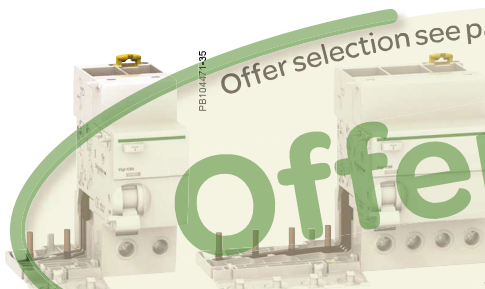


Country approval pictograms

IEC/EN 61009-1

PB104466-35

Offer selection see page 182



- Combined with iC60 circuit breaker, the Vigi iC60 provide:
 - protection of persons against electric shock by direct contact (≤ 30 mA),
 - protection of persons against electric shock by indirect contact (≥ 300 mA),
 - protection of installations against the risk of fire (300 mA).

The SI type provides increased immunity from electrical interference and polluted or corrosive environments.

This sticker must be removed before publishing

Catalogue numbers

Vigi iC60 add-on residual current devices

Type	SI	Width in 9 mm modules
Product	Vigi iC60	
Auxiliaries	Without auxiliaries	
2P	Sensitivity	10 mA
DB122462	Rating	30 mA
	25 A	A9V30225
	40 A	A9V61225
	63 A	A9V61240
		A9V61263
		A9V65263
		A9V39263
3P	Sensitivity	10 mA
DB122463	Rating	30 mA
	25 A	A9V61325
	40 A	A9V61340
	63 A	A9V61363
		A9V65363
		A9V39363
4P	Sensitivity	10 mA
DB122464	Rating	30 mA
	25 A	A9V61425
	40 A	A9V61440
	63 A	A9V61463
		A9V65463
		A9V39463
Voltage rating (Ue)	230 - 240 V, 400 - 415 V	
Operating frequency	50/60 Hz	
Accessories	Module CA907000	