


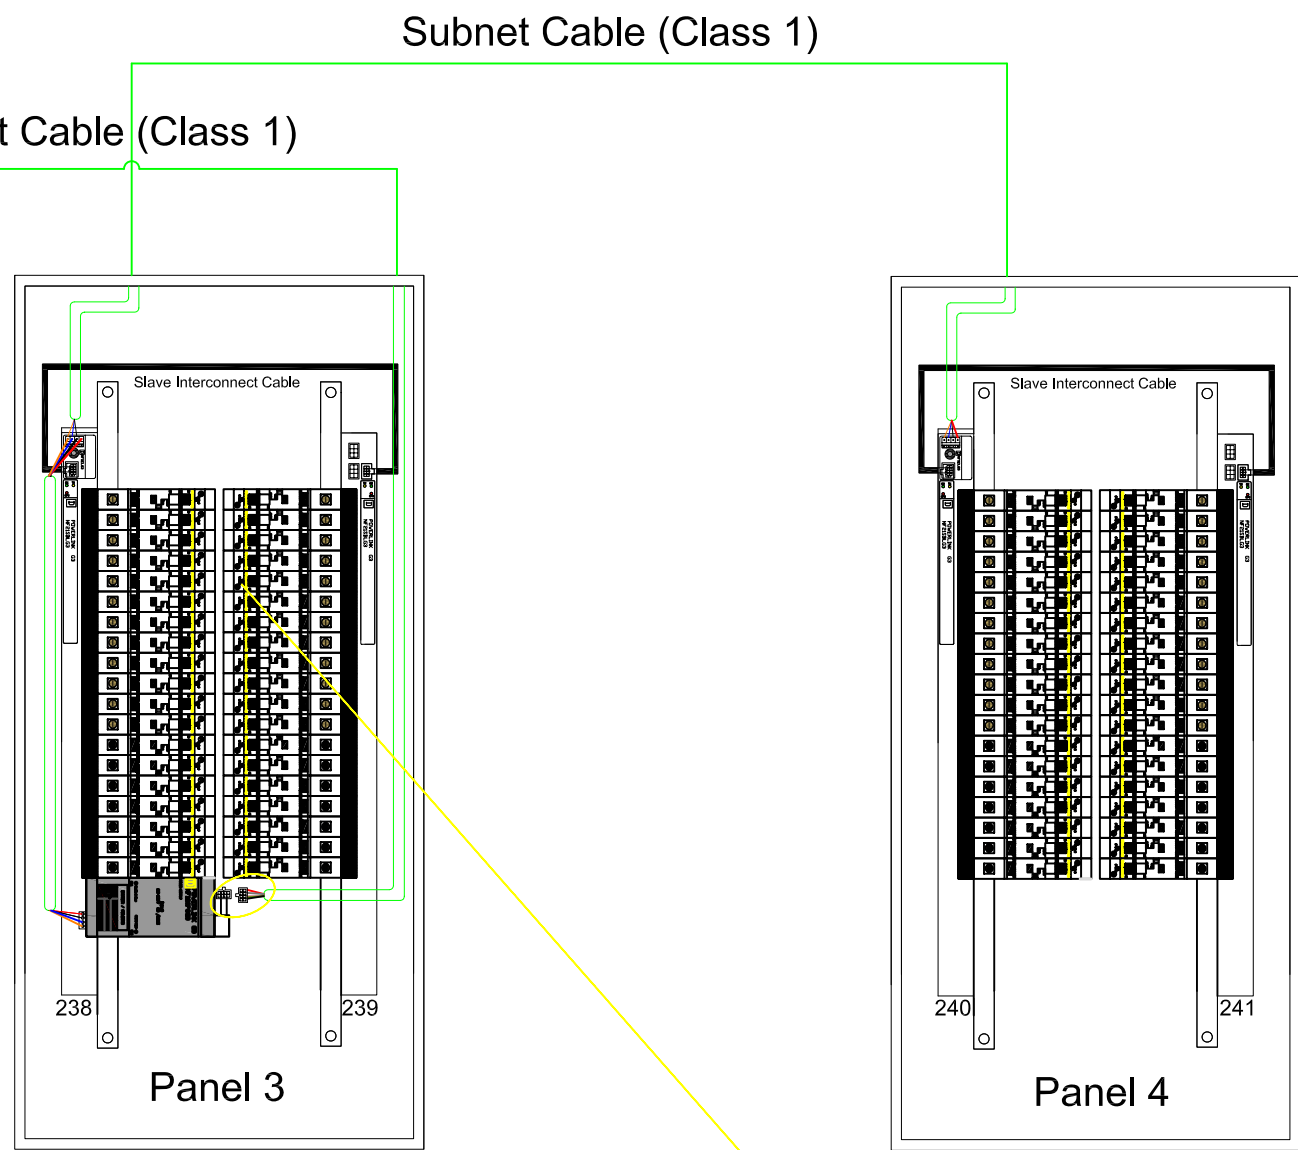
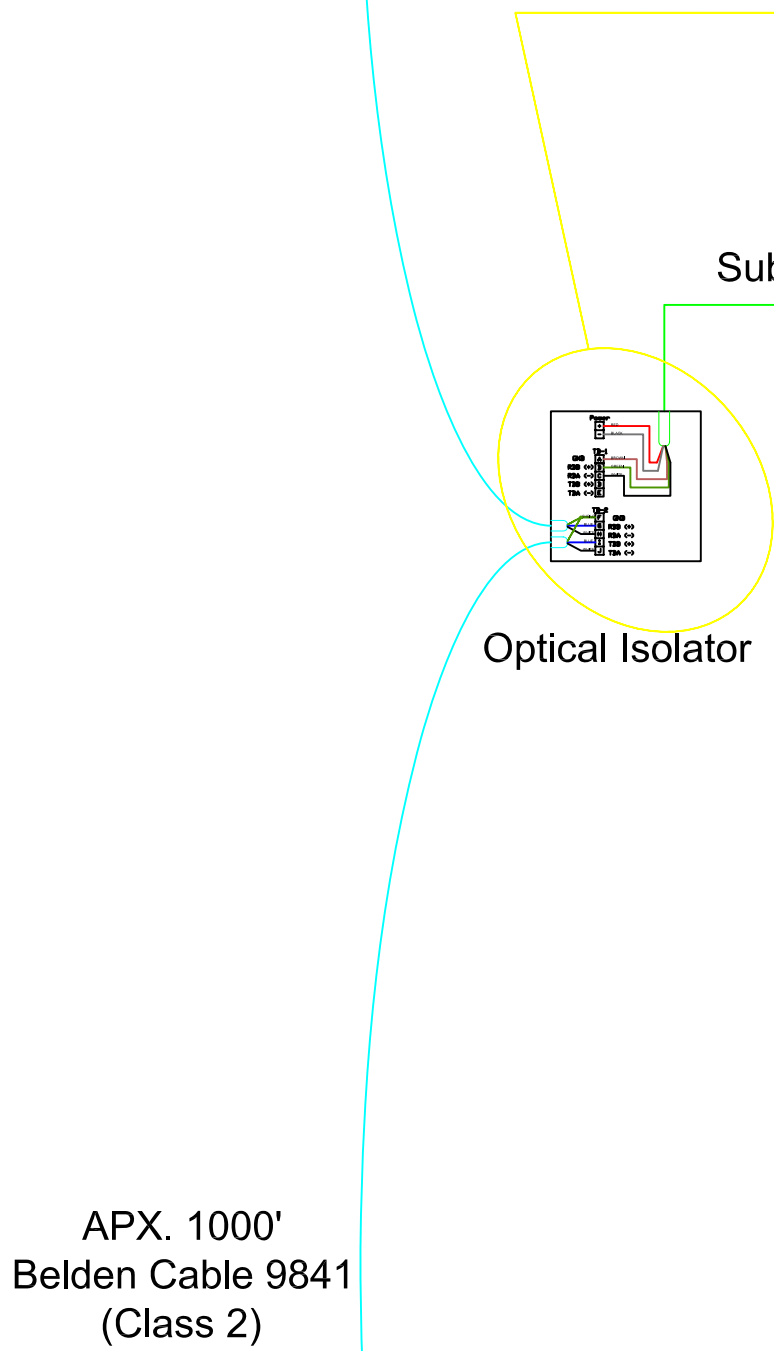
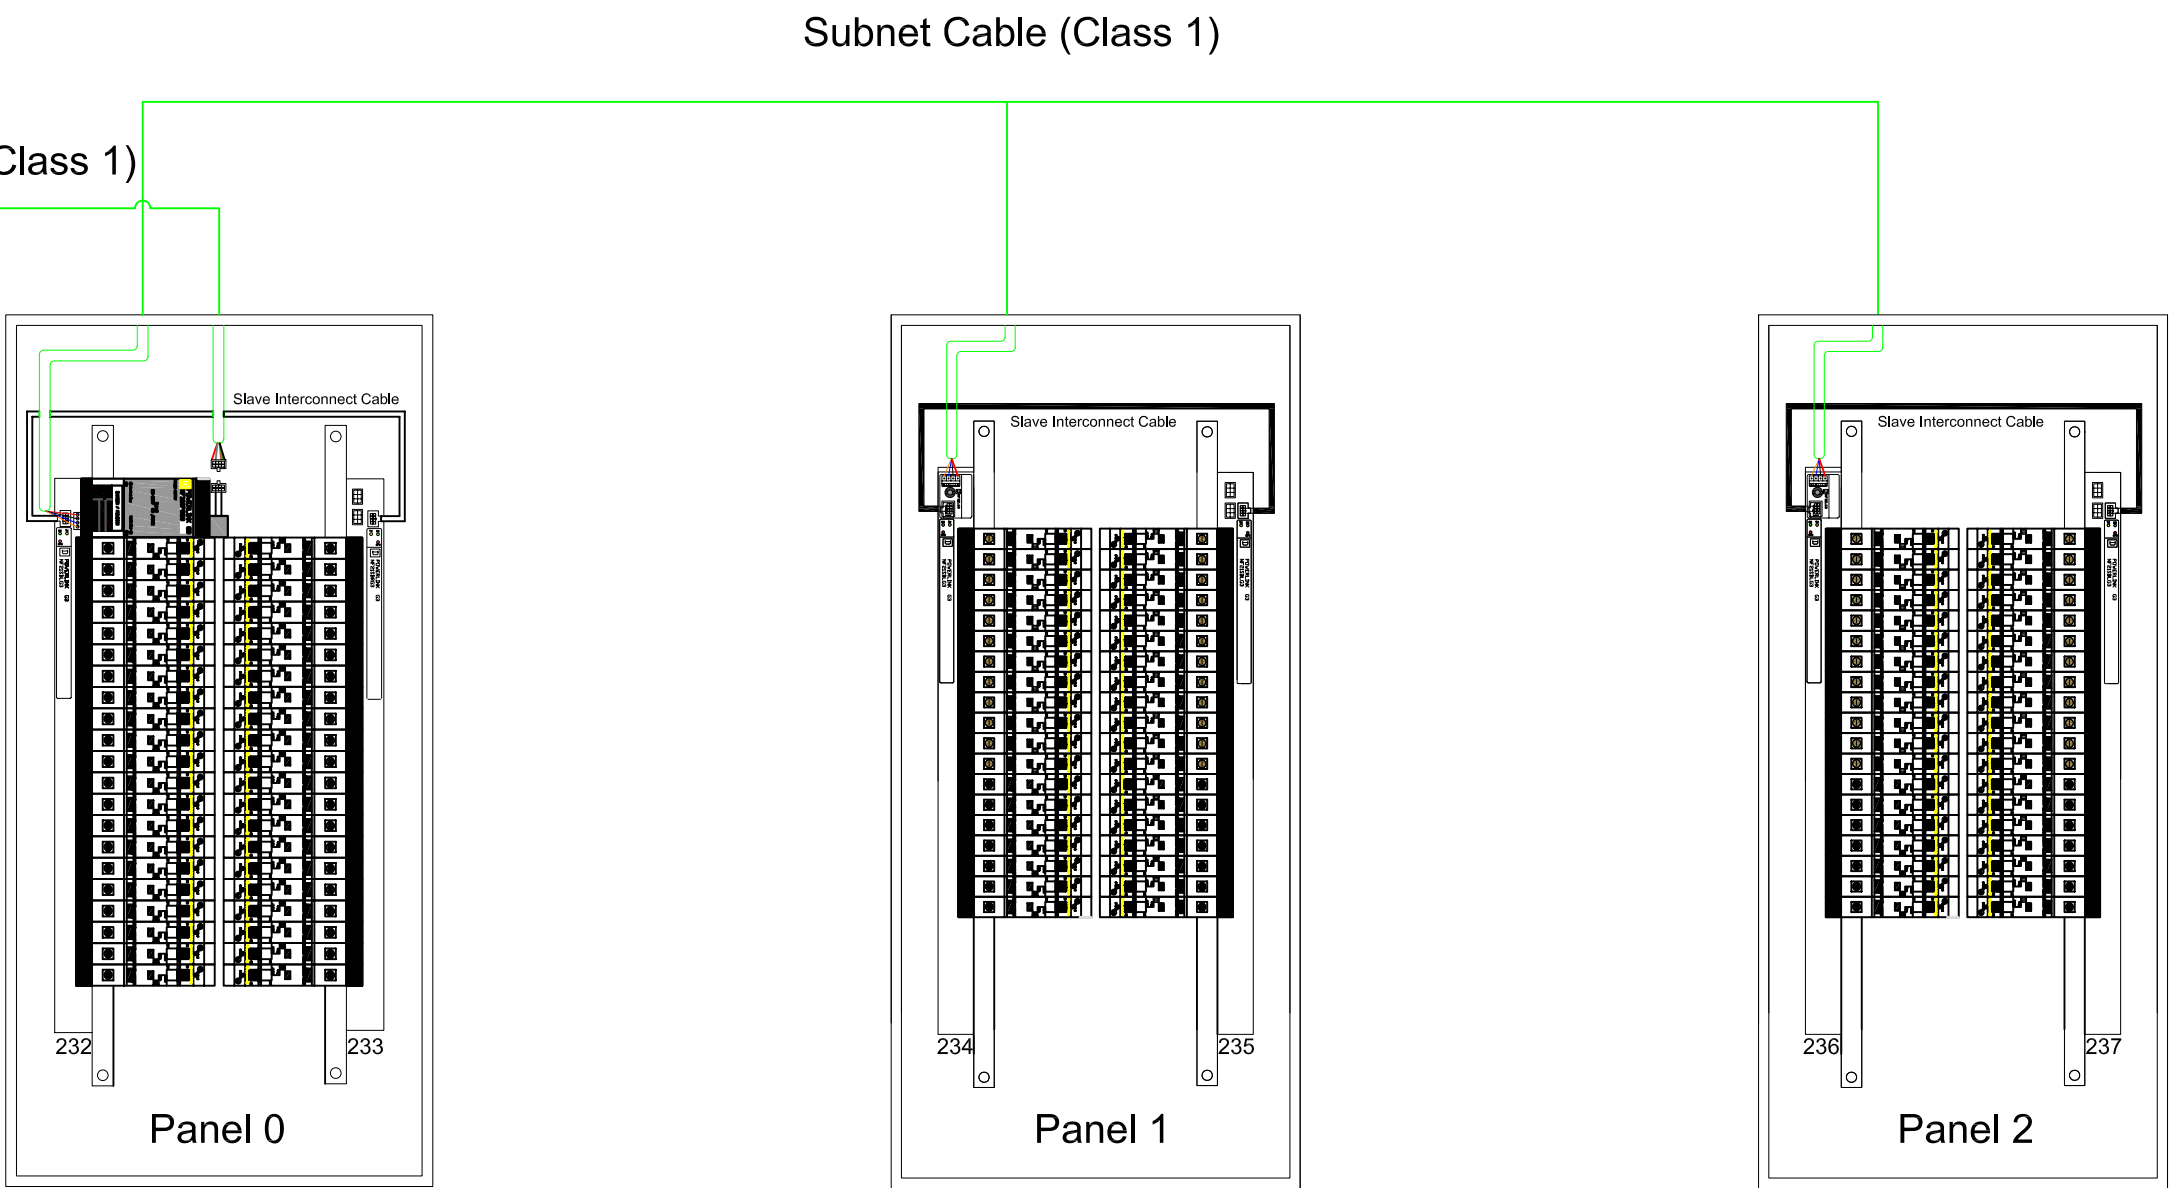


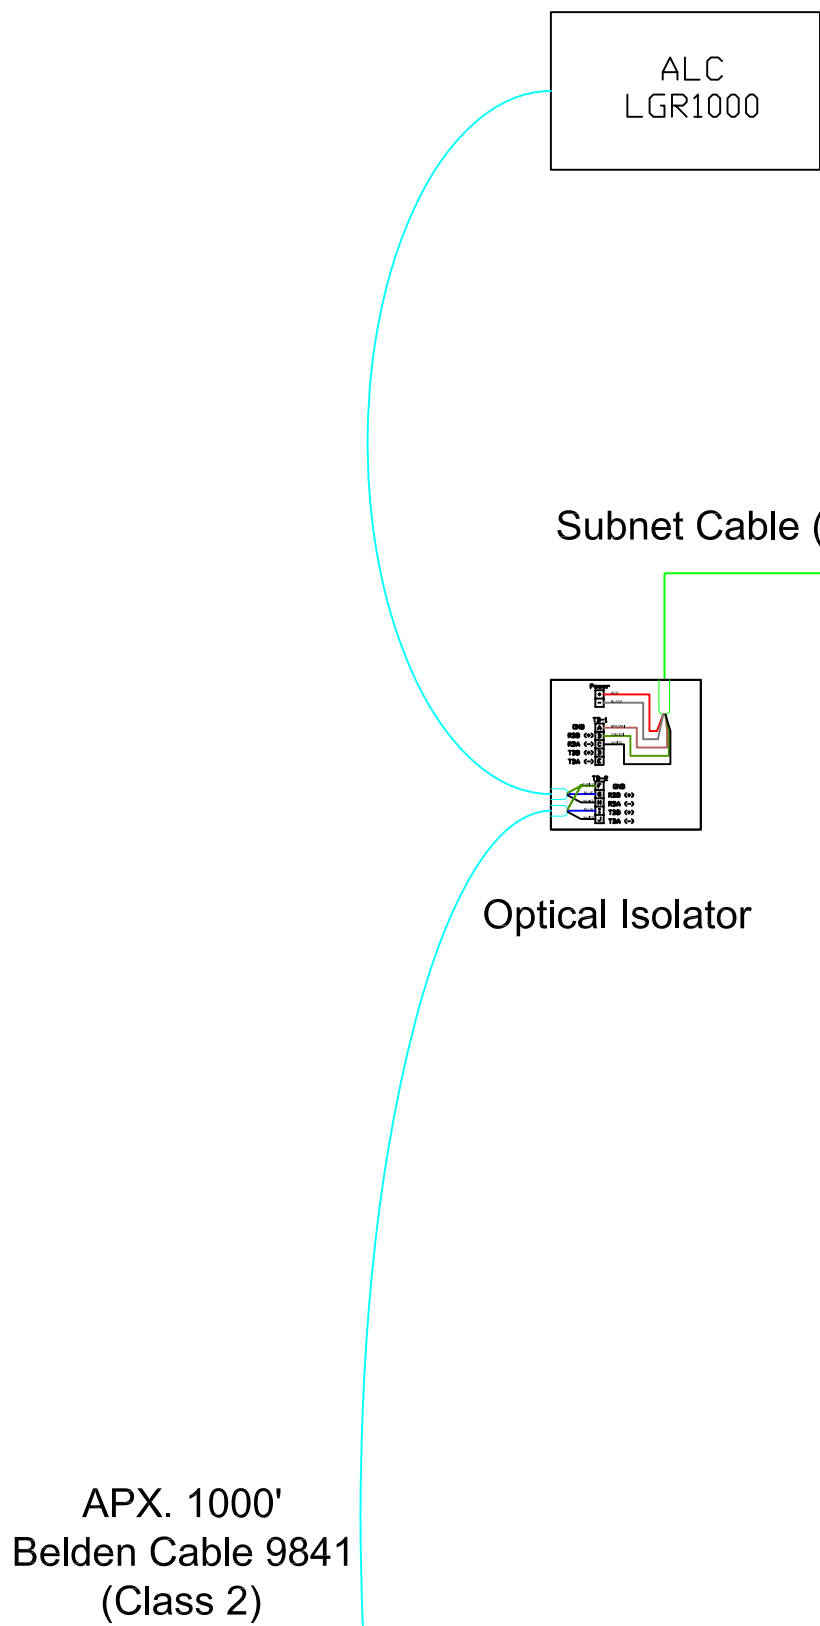


OPTO-ISOLATOR WIRING

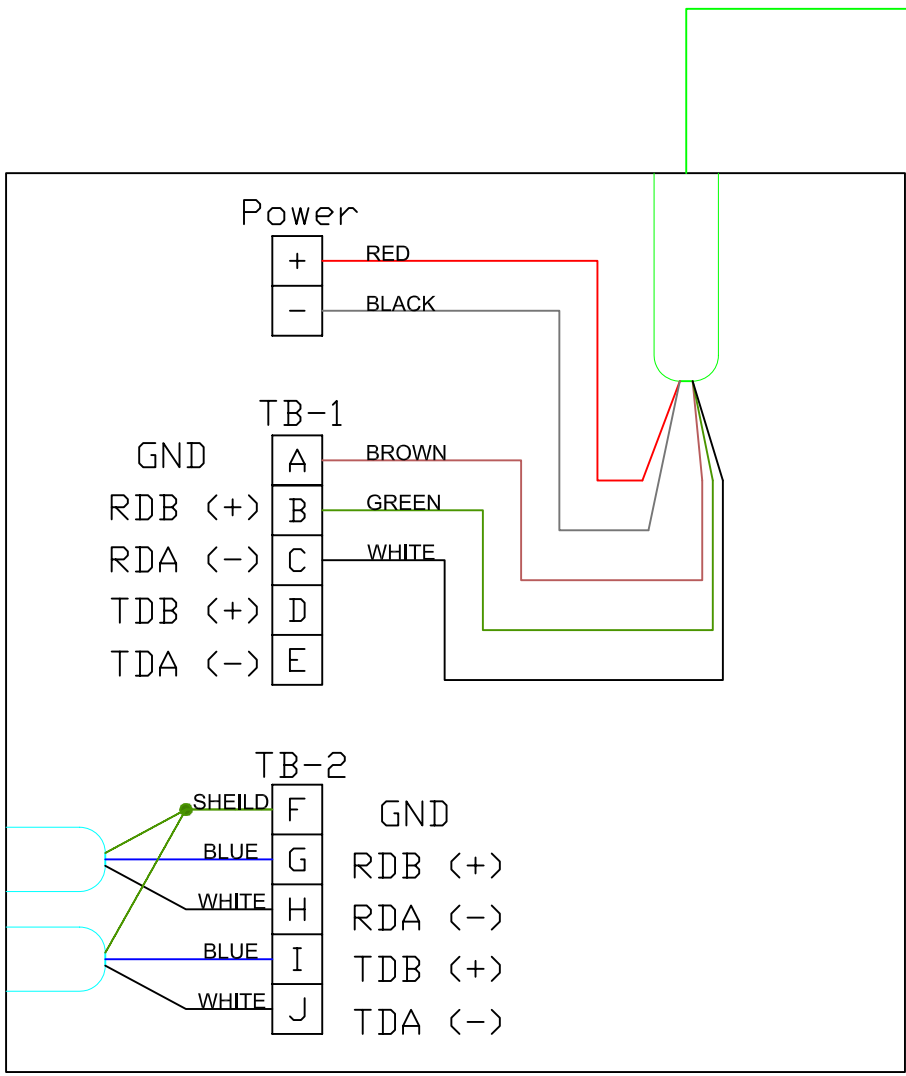

MOLEX CONNECTOR

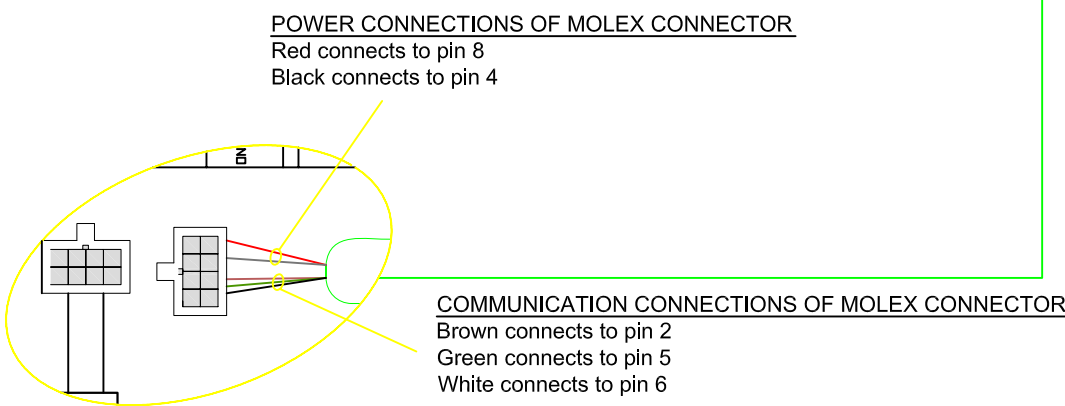

POWERLINK POWER SUPPLY

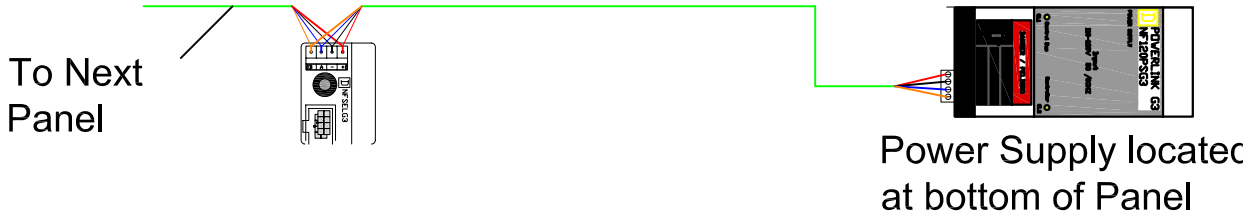

Note: Switch Settings on the Opto Isolator

SW1 and SW2
On (down) : 1-5 and 11
Off (up) : 6-10 and 12

REV.	ECN NO.	DATE	BY	DO NOT SCALE-WORK TO DIMENSIONS				APPROVALS	DATE
				STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED:	LINEAR	XX = +.01 XXX = +.005		DRAWN KEVIN EATON	02/05/08
					ANGLE	UNDIMENSIONED 90° ± 2° DIMENSIONED ANGLE ± 1°		CHECKED	
					Holes UP TO .750	XX = ±.01 XXX = +.002 - .001	NUMBER OR LETTER SIZE + .004 - .001	ENGINEERING	
							REAMED +.002 -.000	MANUFACTURING	

FILE NAME TARGET.DWG	CAT.NO.		 [®] SQUARE  COMPANY LAVERGNE, TENNESSEE, U. S. A.	
	TITLE			
	TARGET WIRING DIAGRAM		USED ON	
	RAWSTOCK	MATERIAL		
	PART NO.	NUMBER		SHEET 1 OF 1
			SCALE N/A	
			REV 1	