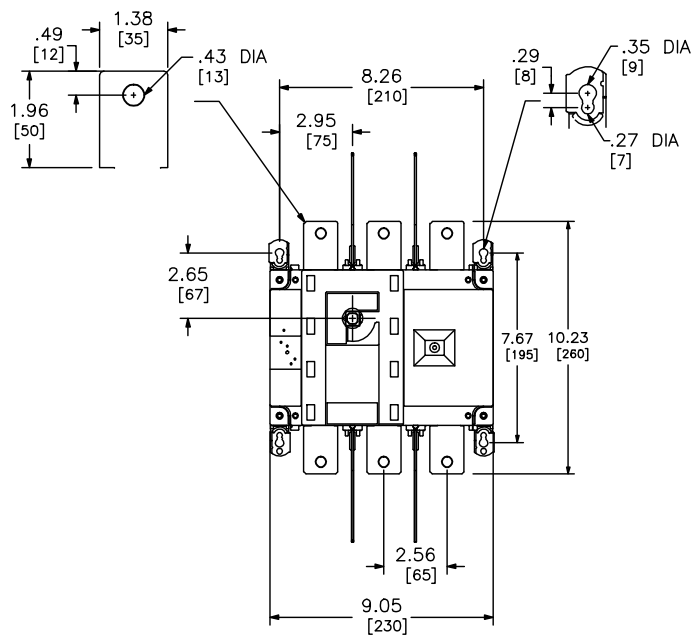


CATALOG NO:..... LK4QU3N
 RATING:..... 400A
 OPERATING VOLTAGE:..... MAX 600V AC, 250V DC
 TERMINAL TIGHTENING:..... 31 LB-IN
 WIRE RANGE & LUG KITS:.. USE AWG #4 - 600 kcmil OR AWG (2) #1/0-250 kcmil WITH LUG KIT GS1AW606 AND SET SCREW TIGHTENING TORQUE 500 LB-IN
 USE AWG #6-350 kcmil WITH LUG KIT GS1AW603 AND SET SCREW TIGHTENING TORQUE 375 LB-IN
 STANDARDS:..... UL LISTED - CSA CERTIFIED - IEC RATED

400A LK4
 NON-FUSIBLE DISCONNECT SWITCHES

DUAL DIMENSIONS: INCHES
 MILLIMETERS

Schneider
 Electric

DWG# PWCTR-LP67-0012
 NO.