



GV2, GV3, and GV7 Manual Motor Starters, Controllers, and Protectors Mounting Dimensions and Wiring Diagrams

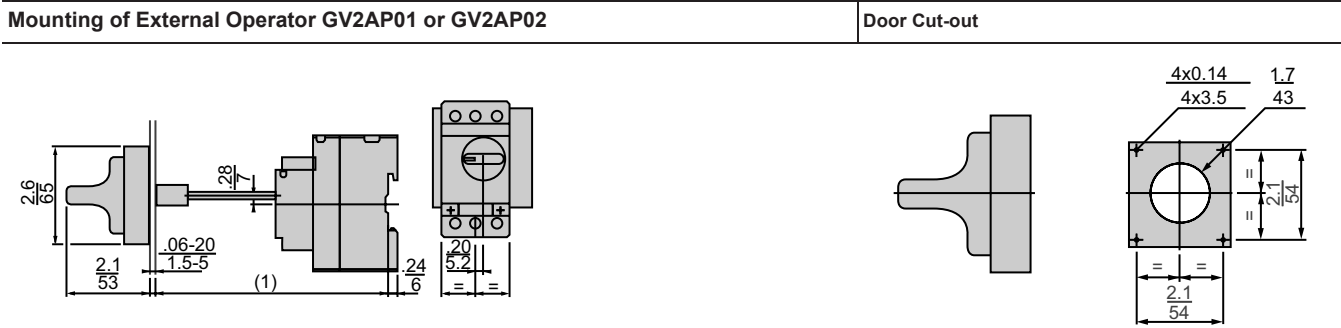

1. 135 mm minimum, 284 mm maximum with operating rod uncut, 88 with operating rod cut.

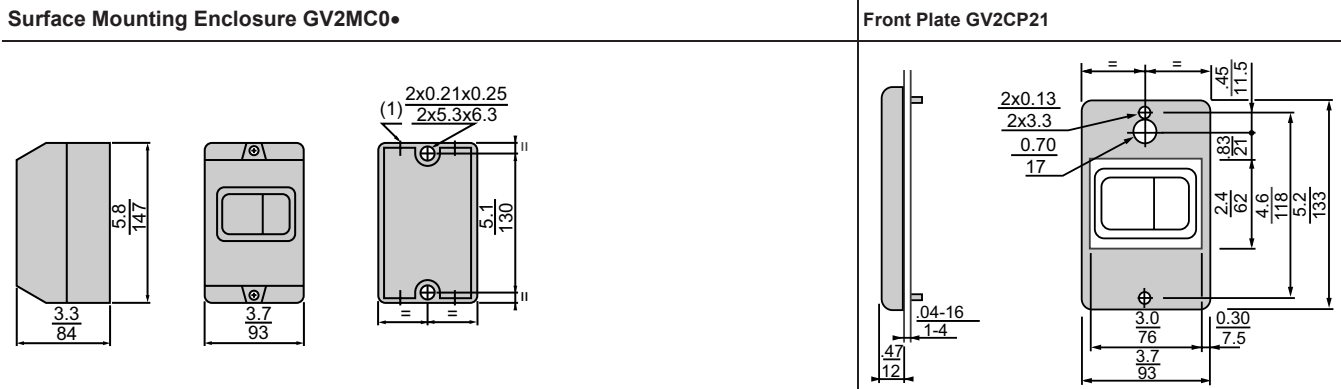

1. 4 knock-outs for 0.63 in. (16 mm) plastic cable entries or n° 16 conduit

Flush Mounting Enclosure GV2MP0• (bracket cut-out dimensions)

