



REV	DESCRIPTION	BY	DATE	—	----	—	----
—	----	—	—/—/—	—	----	—	----

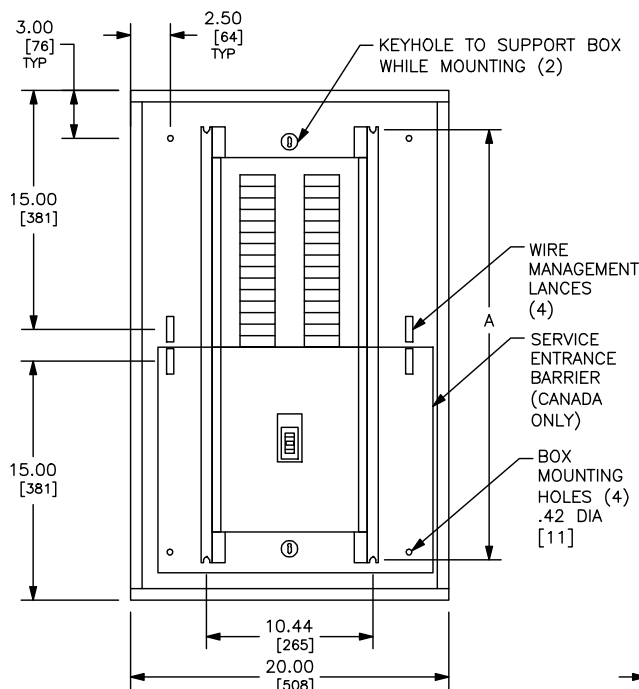


TYPICAL BOX WITH INTERIOR

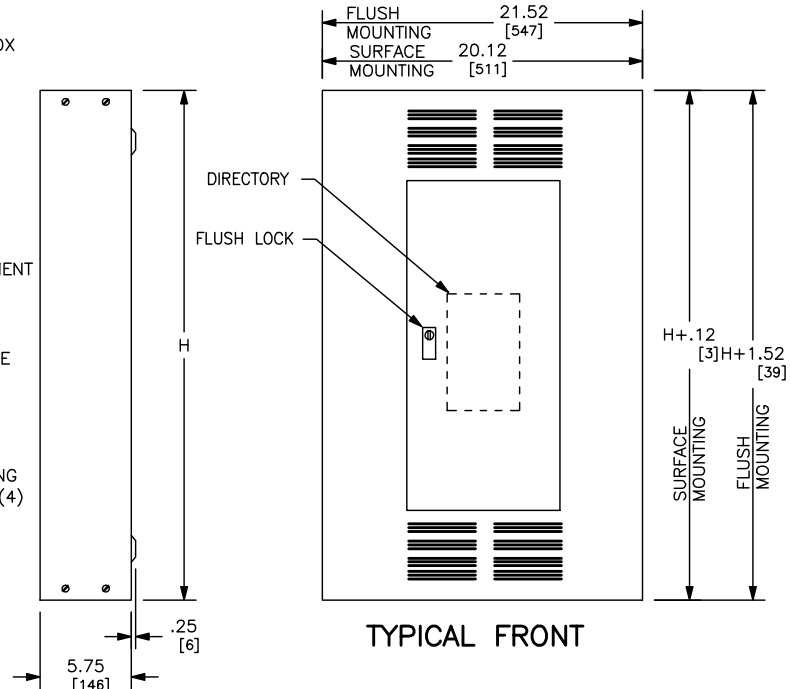


TYPICAL BOX SIDE VIEW

TYPICAL FRONT

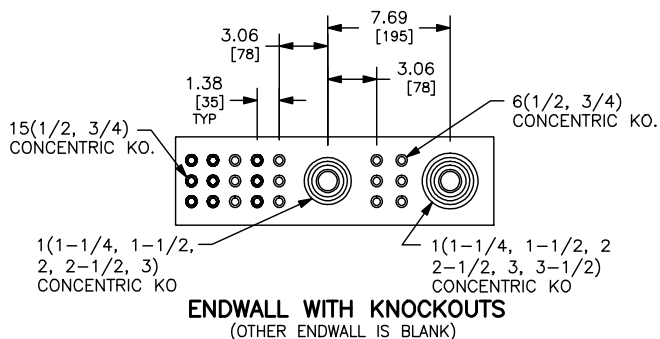

ENDWALL WITH KNOCKOUTS
(OTHER ENDWALL IS BLANK)



TYPICAL MOUNTING OF QO, QOB BREAKERS

DUAL DIMENSIONS: INCHES
MILLIMETERS

REFER TO DP CATALOG CLASS 1640 FOR ADDITIONAL INFORMATION

FOR TYPE 3R APPLICATIONS USE IN CONJUNCTION WITH PBA711

NQ PANELBOARDS MEET THE APPLICABLE REQUIREMENTS OF UL AND CSA.

BOX: CODE GAUGE GALVANIZED STEEL. ONE ENDWALL IS BLANK, THE OTHER HAS KNOCKOUTS.

FRONT: GRAY BAKED ENAMEL FINISH ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL. FRONT IS VENTED AND MOUNTS TO ENCLOSURE WITH SCREWS. DOOR HINGES ARE CONCEALED.

LOCK: FLUSH LOCK WITH BRUSHED STAINLESS STEEL ESCUTCHEON. NSR-251 KEY.

MAXIMUM LA/LH MAIN BREAKER AMPERE RATING	MAXIMUM NUMBER OF CIRCUITS	H		A	
		IN	MM	IN	MM
400A	30 & 42	62.00	1575	57.00	1448
	54	68.00	1727	63.00	1600
	72	74.00	1880	69.00	1753
	84	80.00	2032	75.00	1905
400A FEED THRU LUGS	30 & 42	68.00	1727	63.00	1600
	54	74.00	1880	69.00	1753
	72	80.00	2032	75.00	1905
	84	80.00	2032	75.00	1905
400A WITH SUB FEED BREAKERS	30 & 42	86.00	2184	81.00	2057

JOB NAME: ---	EQUIPMENT DESIGNATION: ---
JOB LOCATION: ---	EQUIPMENT TYPE: NQ MCB 400A TYPE 1
DRAWN BY: ---	DRAWING TYPE: ---
ENGR: ---	
DATE: MAY 2010	
DRAWING STATUS: ---	
DWG# PBA710A	PG 01 OF 01 REV ---