


SPECIFICATIONS:
CONSTRUCTION: PER UL STANDARD 891

ENCLOSURE: TOTALLY ENCLOSED, FRONT ACCESSIBLE,
CODE GAUGE STEEL. ANSI #49 BAKED ENAMEL FINISH.




DISTRIBUTION PANEL: I-LINE PANEL ACCEPTS QB,QD, QG, QJ, FY, FA, FH,
FC, HD, HG, HJ, HL, JD, JG, JJ, JL, LA, LH, LC, MG, MJ, PG, PJ AND
PL CIRCUIT BREAKERS

BUS MATERIAL: COPPER

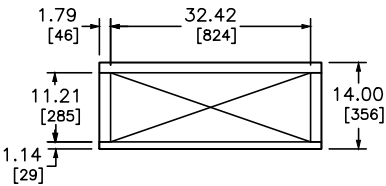

SBAD800
THE SHORT-CIRCUIT CURRENT RATING OF THIS SWITCHBOARD SECTION IS EQUAL TO THE LOWEST SHORT-CIRCUIT RATING OF ANY SECTION ELECTRICALLY CONNECTED IN SERIES, OR THE LOWEST MARKED RATING AT THE SUPPLY VOLTAGE OF ANY CIRCUIT BREAKER OR SERIES CONNECTED RATING INSTALLED IN THIS SECTION. THE SECTION'S MAXIMUM SHORT-CIRCUIT CURRENT RATING IS 65,000 RMS SYMMETRICAL AMPERES AT 240V AC OR 65,000 RMS SYM. AMPERES AT 480V AC.

SBSAD800
THE SHORT-CIRCUIT CURRENT RATING OF THIS SWITCHBOARD SECTION IS EQUAL TO THE LOWEST SHORT-CIRCUIT RATING OF ANY SECTION ELECTRICALLY CONNECTED IN SERIES, OR THE LOWEST MARKED RATING AT THE SUPPLY VOLTAGE OF ANY CIRCUIT BREAKER OR SERIES CONNECTED RATING INSTALLED IN THIS SECTION. THE SECTION'S MAXIMUM SHORT-CIRCUIT CURRENT RATING IS 125,000 RMS SYMMETRICAL AMPERES AT 240V AC OR 100,000 RMS SYM. AMPERES AT 480V AC.

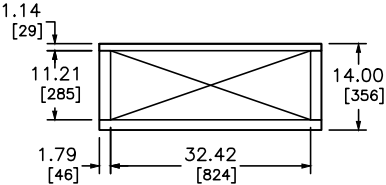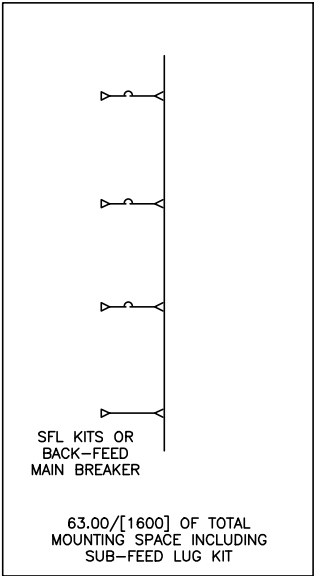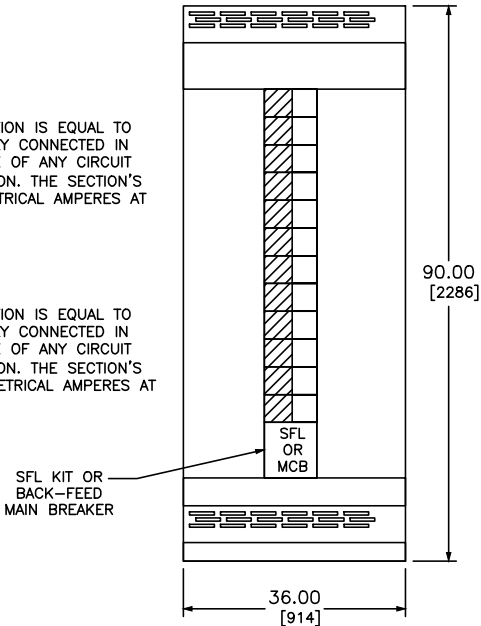

CATALOG NUMBER--SERIES E4

ADD ON DISTRIBUTION SECTION
SBAD800 INDOOR *
SBAD800R OUTDOOR *
SBSAD800 INDOOR **
SBSAD800R OUTDOOR **

* ADD-ON DISTRIBUTION SECTION, MUST BE CONNECTED TO AN SB UCT AND MAIN SECTION WITHOUT DISTRIBUTION PANEL SUCH AS SB348WS. AN I-LINE PLUG-ON SUB-FEED LUG KIT MUST BE ORDERED TO TERMINATE THE DISTRIBUTION SECTION.

** STAND-ALONE DISTRIBUTION SECTION NOT CONNECTED TO AN SB SECTION. A BACK-FED MAIN BREAKER OR I-LINE PLUG-ON SUB-FEED LUG KIT MUST BE ORDERED TO TERMINATE THE DISTRIBUTION SECTION. (NON-ULSE)

NOTES:
SEE DRAWING SPEED_D11 FOR TYPE 3R ENCLOSURE DIMENSIONS.

I-LINE 800 AMP ADD-ON SECTION
SPEED D SWITCHBOARD
ELEVATION



DWG# SPEED-D09
NO.

DUAL DIMENSIONS: INCHES
MILLIMETERS