



Standard locks

Spacial S3DC wall-mounting enclosures are supplied with a screwdriver insert (coin protected) lock as standard.

- Large range of standardized inserts covering the most common needs.
- Installation and removal with a single screw.

Description	Catalog number of form insert*
6-mm (0.2 in.) square	NSYAEDLS6S3D
7-mm (0.3 in.) square	NSYAEDLS7S3D
8-mm (0.3 in.) square	NSYAEDLS8S3D
3-mm (0.1 in.) double bar	NSYAEDLB3S3D
5-mm (0.2 in.) double bar	NSYAEDLB5S3D
CNOMO 6.5-mm (0.3 in.) triangular	NSYAEDLT6S3D
8-mm (0.3 in.) triangular	NSYAEDLT8S3D

* Delivered with 1 plastic key.



Standard handles with keys

Attractive and ergonomic bi-material handle.

- Large range of barrels covering the most common needs.
- Standard cam (see diagram above).
- The installation of the standard handle does not require the escutcheon to be removed.

Description	Catalog number of handle with keys*
1242	NSYAEDL1242S3D
405	NSYAEDL405S3D
421	NSYAEDL421S3D
455	NSYAEDL455S3D
2331A	NSYAEDL2331S3D
2433A	NSYAEDL2433S3D
3113A	NSYAEDL3113S3D

* Delivered with 2 keys.



Lock with screwdriver insert and metal latch

Catalog number
NSYAEDLSDS3D



Handle lock operated using screwdriver insert

Catalog number
NSYTSMLS3D

Accessories

Locking accessories



Double lock


- Easy mounting in place of the standard lock.
- Material: zamack.

Delivered with 3-mm (0.1 in.) double-bar metal key.

Description	Catalog number
DIN half-cylinder (1)	NSYAEDLDINS3D
Padlockable 405 (2)	NSYAEDLPADS3D

(1) Delivered without barrel. Please contact us.

(2) Diameter 8 mm (0.3 in.).

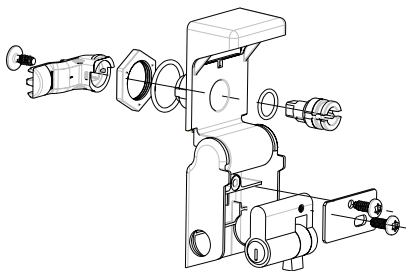

Locks with keys

Easy mounting in place of the standard lock.

- Metal cam supplied.

EDF lock	Catalog number
EDF 900	NSYAEDLEDF9S3D
EDF 1300	NSYAEDLEDF13S3D
EDF 1400	NSYAEDLEDF14S3D



180° hinge.



120° hinge.

Door hinges

Two models:

- For opening the door to an angle of 180°.
- Spare standard hinges (120°).
- Captive pin, indexed by a spring.
- Batch of 1 hinge, delivered with hardware.
- Material: zamack body for catalog number **NSYAEDH180S3D**, treated sheet-steel body for catalog number **NSYAEDH120S3D**, aluminum pin.
- For the 180° hinge, the maximum allowable load on the door is 20 kg / m².
- For the 120° hinge, the maximum allowable load on the door is 50 kg / m².

Description	Catalog number
180° hinge for S3DC enclosure	NSYAEDH180S3D
Standard 120° hinge for S3DC	NSYAEDH120S3D

