
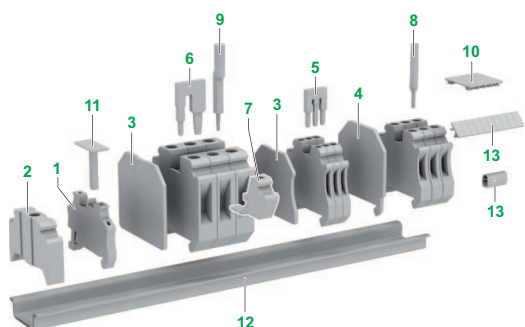


Linery TR

Screw terminal blocks

Screw terminal blocks - Passthrough



		NSYTRV22	
Nominal c.s.a.		2.5 mm²	
	Type of block	Passthrough	
	Type of connection	1 pole - 1 x 1	
	Color	Grey	
Max. electric values (Umax, Imax)		1000 V, 32 A	
Dimensions (mm)			
	Length	47.7	
	Height	47.5	
	Width	5.2	
Cabling c.s.a. (mm²)		2.5	
	Flexible cable	0.14 - 4	
	Solid cable	0.14 - 4	
Nominal electric values			
	IEC/EN 60947-7-1	1000 V, 24 A	
	UL	600 V, 20 A, 26 - 12 AWG	
	CSA	600 V, 20 A, 26 - 12 AWG	
	ATEX 	690 V, 22 A	
Certifications		UL, CSA, VDE, ATEX, IECEx, GL, LR, DNV, EAC	
Terminal blocks			
		Sold in lots of	Unit reference
	Grey	50	NSYTRV22
	Blue	50	NSYTRV22BL
	Orange	50	NSYTRV22AR
	Red	50	NSYTRV22RD
	Green	-	-
	White	50	NSYTRV22WH
	Black	-	-
	Brown	-	-
	Yellow	-	-
Accessories			
End stop	Clip-on, 5.2 mm	50	NSYTRAAB35
for 35 mm DIN rail	With screw, 9.5 mm	50	NSYTRAABV35
End plate	Grey	50	NSYTRAC22
width 2.2 mm	Blue	50	NSYTRAC22BL
Partition plate,	Grey	50	NSYTRAP22
width 2 mm	Blue	50	NSYTRAP22BL
Plug-in bridge	2-pole	50	NSYTRAL22
	3-pole	50	NSYTRAL23
	4-pole	50	NSYTRAL24
	5-pole	50	NSYTRAL25
	10-pole	10	NSYTRAL210
	20-pole	10	NSYTRAL220
Blue	10-pole	10	NSYTRAL210BL
Grey	10-pole	10	NSYTRAL210GR
Step-down bridge, down to 2.5/4 mm²	Screw to screw terminal	-	-
	Screw to spring terminal	-	-
Vertical bridge	1-pole	-	-
Pick-off terminal	Grey	-	-
Test plug	Metallic part, Ø 2.3 mm	10	NSYTRAATM1
	Insulating sleeve, red	10	NSYTRAATP1
Test adaptor	For plug-in bridge shaft	10	NSYTRAFT
Warning label	Yellow	10	NSYTRACS2
Marker tag holder	For  AB35 end stop	100	NSYTRASB4
DIN rail 35 x 7.2 mm	Perforated, 2 m long	20	NSYSDR200BD
Marking accessories		See page 90	
General data			
	Strip length (mm)	9	
	Screw thread	M3	
	Torque (Nm)	0.5 - 0.6	