


Section 8—800–5000 A Busway
Cable Tap Box (Center)

Cable Tap Box (Center)

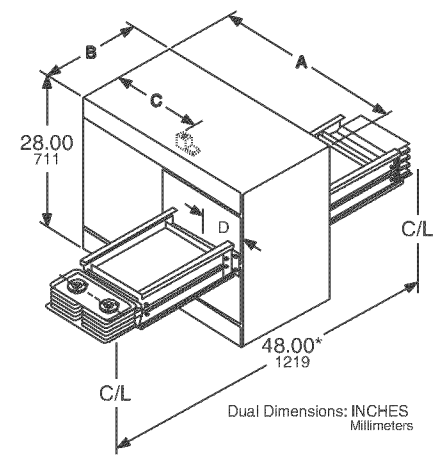

* 3000 A / 3200 A / 4000 A / 5000 A Center Tap Box
Length—60 in. (1524 mm)

Catalog Number Suffix—CTB

Cable Tap Box (Center)—Dimensions and Lug Specifications

Ampere Rating		A		B		C		D		Lugs Per Phase and Neutral 1/0-600 kcmil	Ground Lugs	
Aluminum	Copper	IN	mm	IN	mm	IN	mm	IN	mm		#6 - 300 kcmil	1/0-600 kcmil
800	800	35.00	889	14.00	356	16.00	406	7.27	185	3	3	—
1000	1000	35.00	889	14.00	356	16.00	406	7.27	185	4	4	—
1200	1200	35.00	889	14.00	356	16.00	406	7.27	185	4	4	—
1350	1350	35.00	889	14.00	356	16.00	406	7.27	185	5	5	—
1600	1600	35.00	889	14.00	356	16.00	406	7.27	185	6	6	—
—	2000	35.00	889	14.00	356	16.00	406	10.28	185	7	7	—
2000	—	41.70	1059	20.00	508	17.60	447	12.56	261	7	7	—
—	2500	41.70	1059	20.00	508	17.60	447	12.56	319	9	—	9
2500	—	41.70	1059	20.00	508	17.60	447	16.00	319	9	—	9
3000	3000	60.00	1524	22.00	559	26.00	660	19.00	406	10	—	10
—	3200	41.70	1059	20.00	508	17.60	447	16.00	319	11	—	11
3200	—	63.00	1600	32.00	813	26.00	660	19.00	484	11	—	11
4000	4000	63.00	1600	32.00	813	26.00	660	19.00	483	14	—	14
—	5000	63.00	1600	32.00	813	26.00	660	19.00	483	17	—	17