



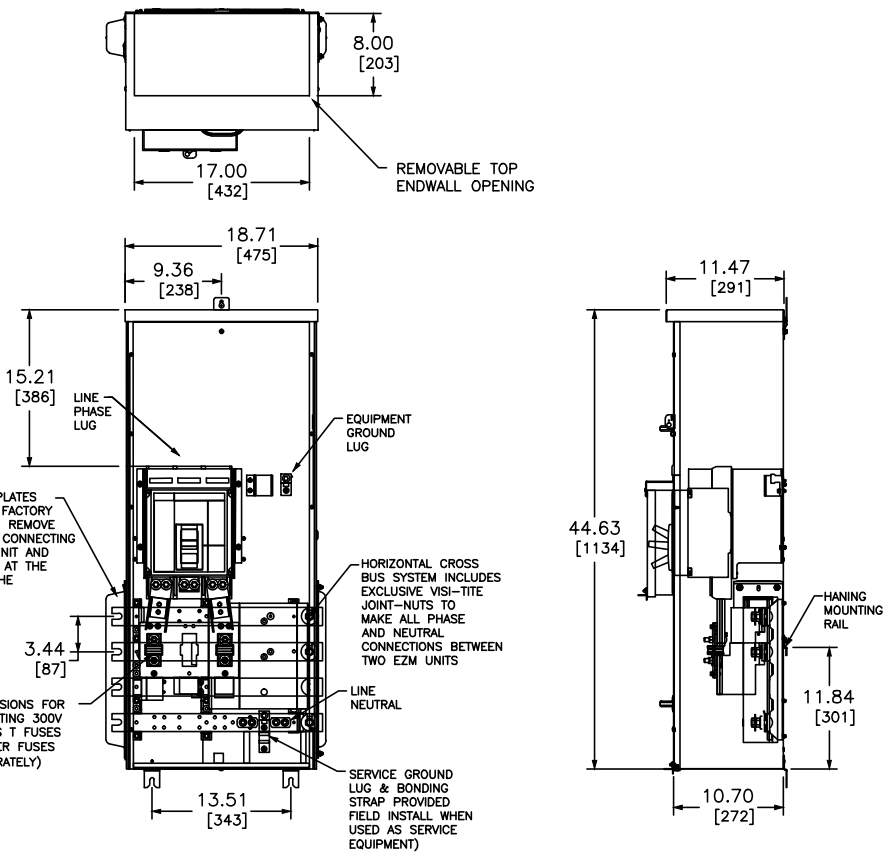

NOTES:
 FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.
 UL LISTED - FILE E-10582, VOL. M, E131840, VOL M
 SUITABLE FOR USE AS SERVICE EQUIPMENT.
 MAIN HORIZONTAL CROSS BUS RATED AT 800 AMPERES.
 MAIN DEVICES ARE SEALABLE BY UTILITY.
 GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY.
 (NOT SUITABLE FOR FLOOR STANDING EQUIPMENT.)
 ‡ WHEN USED AS SERVICE EQUIPMENT, INSTALL BONDING STRAP AND REINSTALL GROUND LUG WHERE APPROPRIATE.

ADDITIONAL NOTES:
 ♦ ALTERNATE LUG KITS ARE AVAILABLE FOR USE ON LINE SIDE OF MOLDED CASE SWITCH (REFER TO DIGEST 176, PAGE 7-42).
 ▼ ALTERNATE NEUTRAL LUG AVAILABLE, ORDER ONE (1) KIT, MMLK 250 FOR (1) 1/0 AWG - 600 KCMIL OR (2) #1/0 AWG - 250 KCMIL AL/CU (KIT INCLUDES THREE, 2-BARREL LUGS), NEUTRAL WILL ACCOMMODATE TWO, 2-BARREL LUGS ONLY.

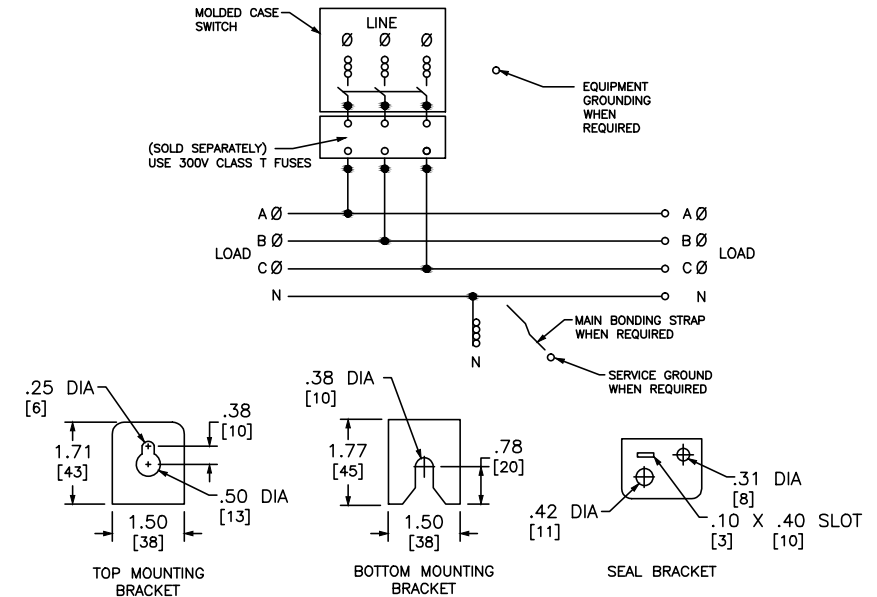

DUAL DIMENSIONS: INCHES
MILLIMETERS

SYSTEM TYPE	MAIN RATING (AMPERES)	CATALOG NUMBER	MOLDED CASE SWITCH (FACTORY INSTALLED)	PROVISIONS TO MOUNT 300V CLASS T FUSES (ORDER SEPARATELY) FUSE RANGE AVAILABLE	LINE SIDE PHASE LUG WIRE RANGE FOR AL OR CU CONDUCTORS (SUPPLIED WITH BREAKER)	LINE SIDE NEUTRAL LUG WIRE RANGE FOR AL OR CU CONDUCTORS (FACTORY INSTALLED)	GROUND LUG WIRE RANGE (FACTORY INSTALLED)
3Ø4W 208Y/120VAC OR 240/120VAC DELTA	600	EZM3600FST	MJM32000Z60	450-600A	(3) 3/0-500 ♦	(4) 3/0-500 ▼	(1) #6-300
	800	EZM3800FST	MJM32000Z80	601-800A	(3) 3/0-500 ♦	(4) 3/0-500 ▼	(1) #6-300

EZ METER-PAK GANGABLE
 MULTI-METERING EQUIPMENT
 600A-800A 3PH 4W MAIN FUSIBLE SWITCH DEVICES
 OVERHEAD FEED ONLY
 RAINPROOF NEMA TYPE 3R ENCLOSURES



DWG# PWFDS-SYRS-0093
NO.