

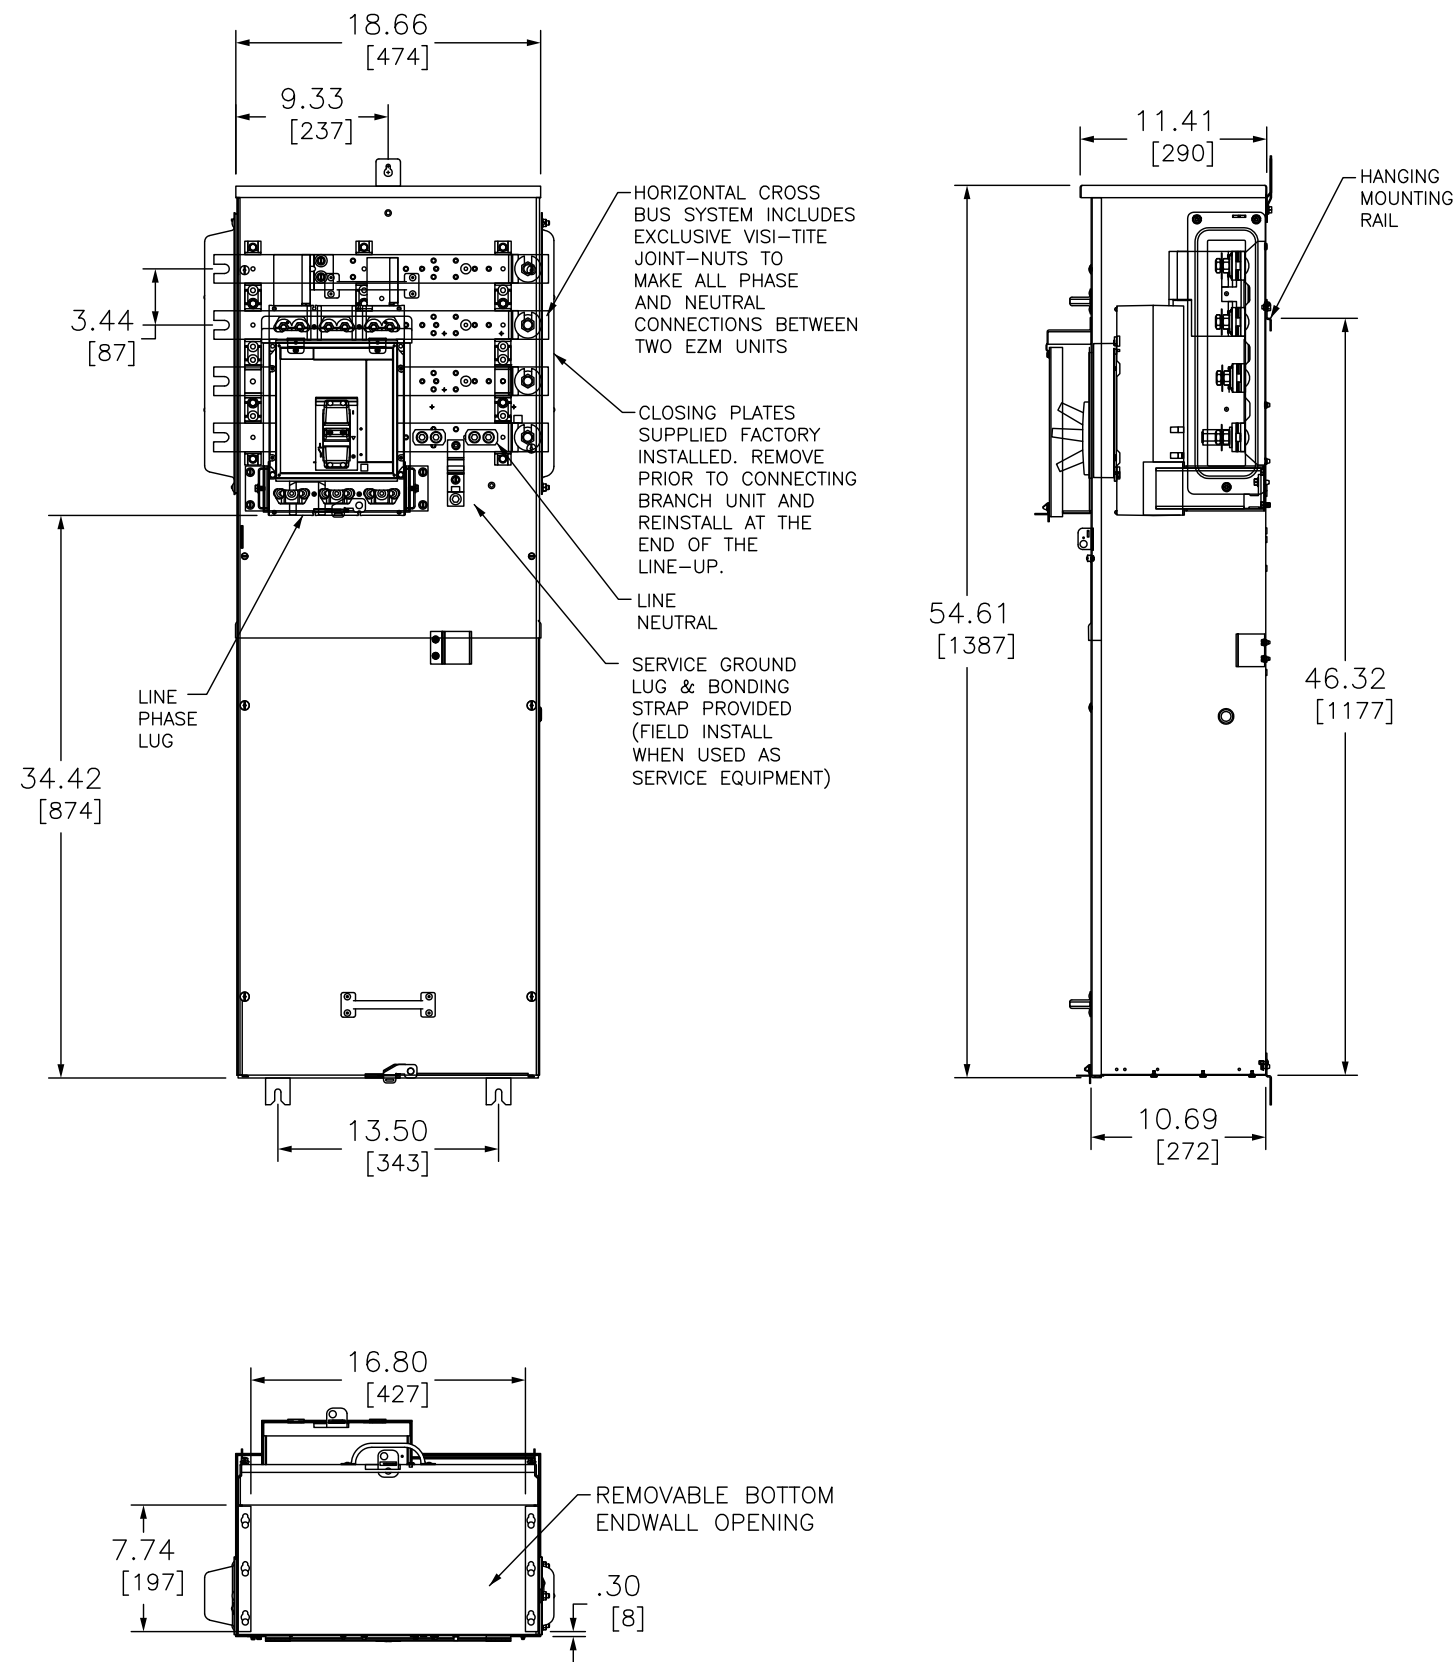


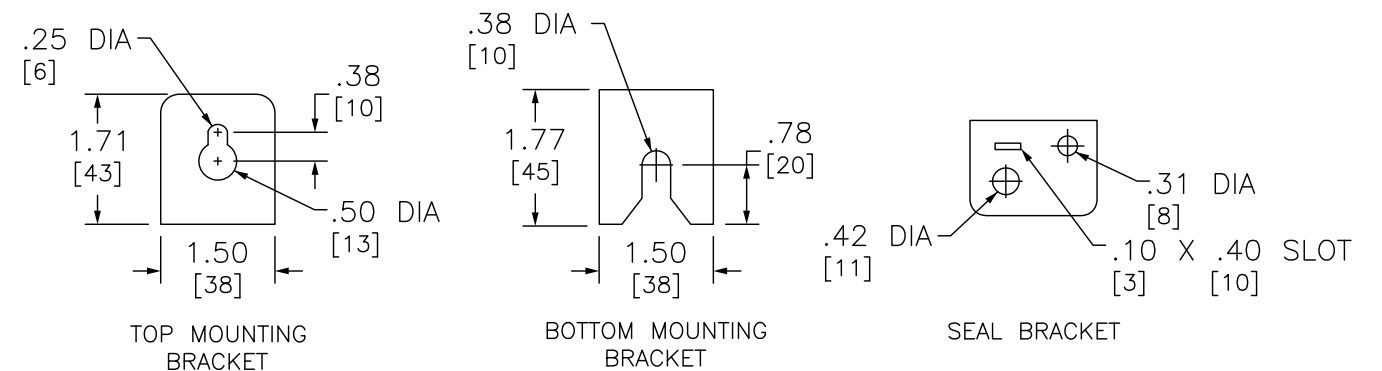

- ADDITIONAL NOTES:
- ◆ ALTERNATE LUG KITS ARE AVAILABLE FOR USE ON LINE SIDE OF MOLDED CASE CIRCUIT BREAKER (REFER TO DIGEST 176, PAGE 7-42).
 - ▼ ALTERNATE NEUTRAL LUG AVAILABLE, ORDER ONE (1) KIT, MMLK 250 FOR (1) #1/0 AWG-600 KCMIL OR (2) #1/0 AWG-250 KCMIL AL/CU (KIT INCLUDES THREE, 2-BARREL LUGS), NEUTRAL WILL ACCOMODATE TWO, 2-BARREL LUGS ONLY.

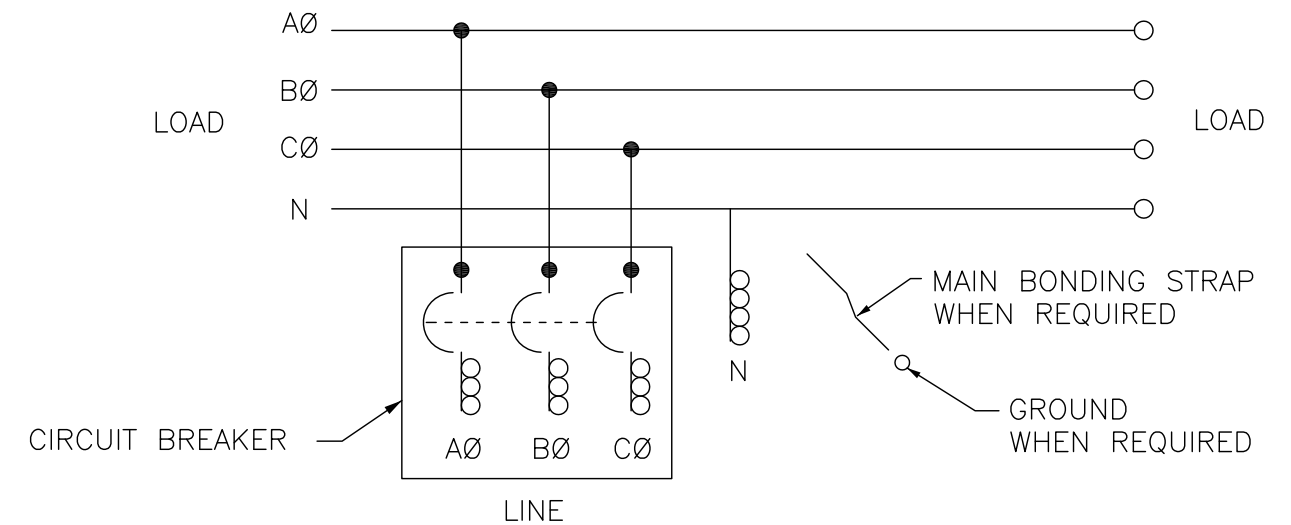

DUAL DIMENSIONS: INCHES
MILLIMETERS

SYSTEM TYPE	MAIN RATING (AMPERE)	CATALOG NUMBER	MAIN CIRCUIT BREAKER (FACTORY INSTALLED)	LINE SIDE PHASE LUG WIRE RANGE FOR AL OR CU CONDUCTORS (SUPPLIED WITH BREAKER)	LINE SIDE NEUTRAL LUG WIRE RANGE FOR AL OR CU CONDUCTORS (FACTORY INSTALLED)	GROUND LUG WIRE RANGE (FACTORY INSTALLED)
3Ø 4W 208Y/120VAC OR 240/120VAC DELTA	600	EZM3600GCBU	MGP36600 (65kA)	(3) 3/0-500 ◆	(4) 3/0-500 ▼	(1) #6-300
	600	EZM3600JCBU	MJP36600 (100kA)	(3) 3/0-500 ◆	(4) 3/0-500 ▼	(1) #6-300
	800	EZM3800GCBU	MGP36800 (65kA)	(3) 3/0-500 ◆	(4) 3/0-500 ▼	(1) #6-300
	800	EZM3800JCBU	MJP36800 (100kA)	(3) 3/0-500 ◆	(4) 3/0-500 ▼	(1) #6-300

NOTES:

FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.

UL LISTED - FILE E-10582, VOL. M, E131840, VOL M

SUITABLE FOR USE AS SERVICE EQUIPMENT.

MAIN HORIZONTAL CROSS BUS RATED AT 800 AMPERES.

MAIN DEVICES ARE SEALABLE BY UTILITY.

GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY.

(NOT SUITABLE FOR FLOOR STANDING EQUIPMENT.)

WHEN USED AS SERVICE EQUIPMENT, INSTALL BONDING STRAP AND REINSTALL GROUND LUG WHERE APPROPRIATE.

EZ METER-PAK GANGABLE
MULTI-METERING EQUIPMENT
600A-800A 3PH 4W MAIN CIRCUIT BREAKER DEVICES
UNDERGROUND FEED ONLY
RAINPROOF NEMA TYPE 3R ENCLOSURES

SQUARE D
by **Schneider Electric**

DWG# PWFDS-SYRS-0102
NO.