



Dimensions

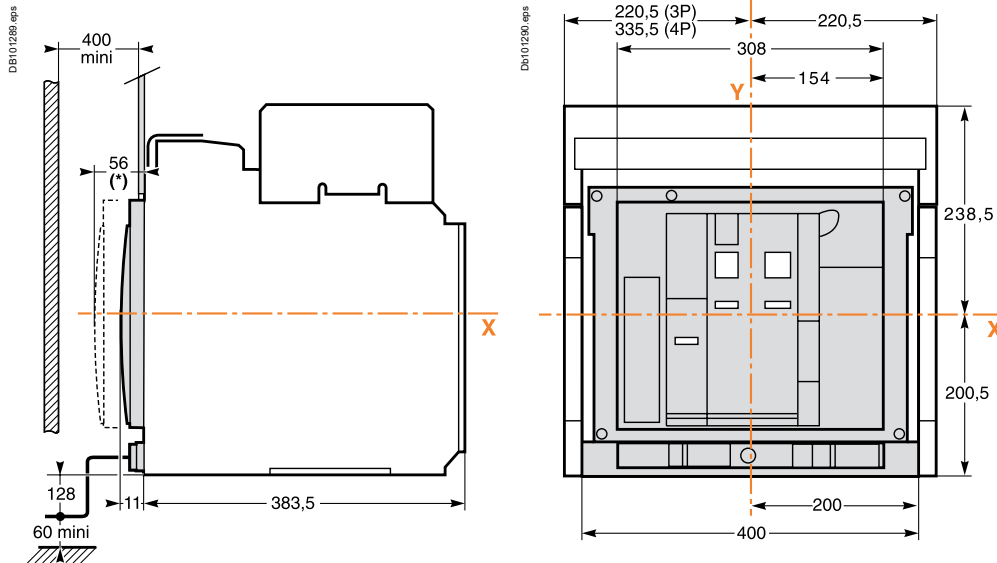


(*) Disconnected position.


Mounting on base plate or rails

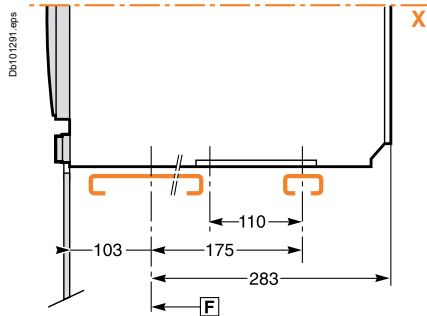


Mounting detail

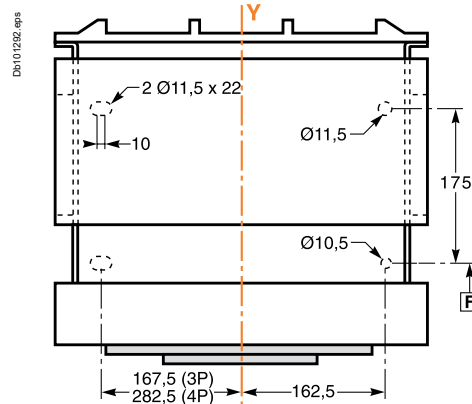

Safety clearances

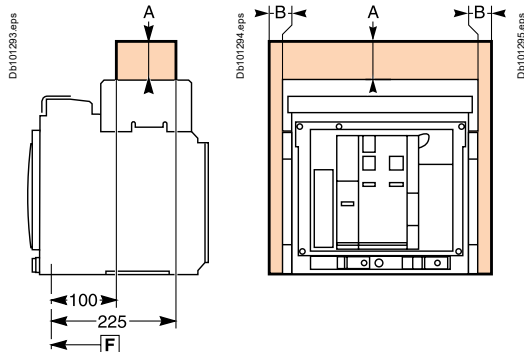

Door cutout

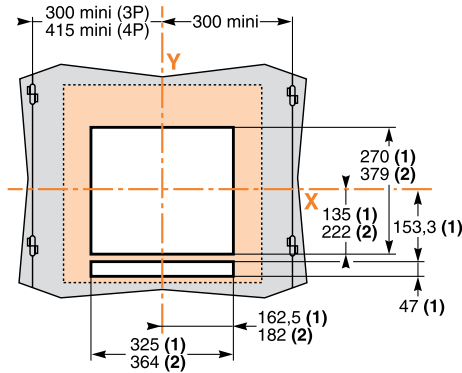

	Insulated parts	Metal parts	Energised parts
A	0	0	0
B	0	0	60

[F]: datum.

(1) Without escutcheon.



(2) With escutcheon.

The safety clearances take into account the space required to remove the arc chutes.


Note: X and Y are the symmetry planes for a 3-pole device.

Connections



Horizontal rear connection

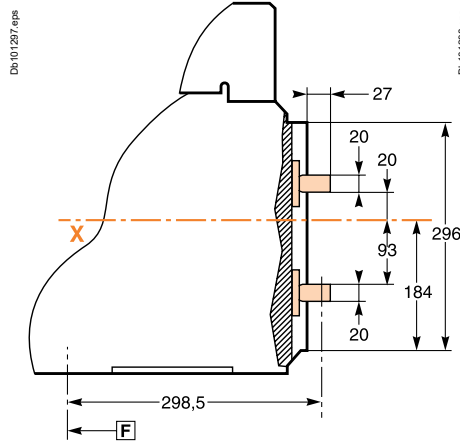


Detail

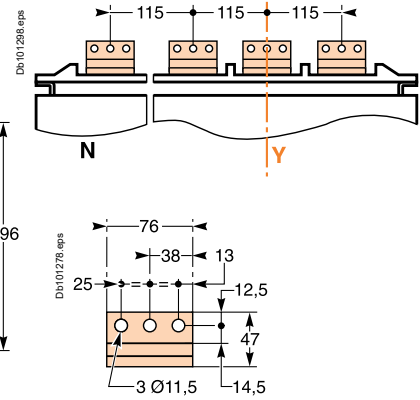



Vertical rear connection

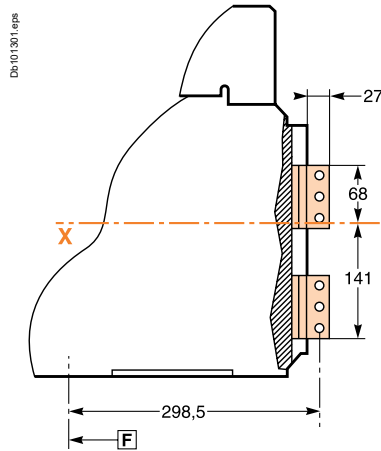


Detail

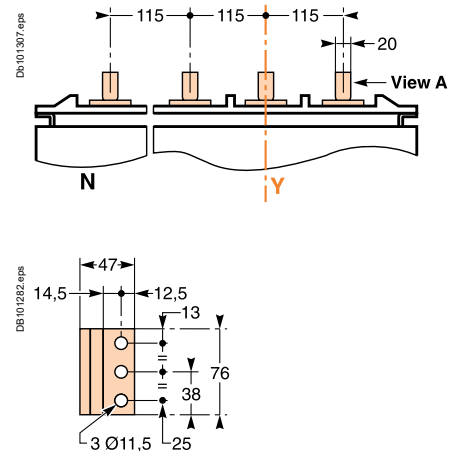

Front connection

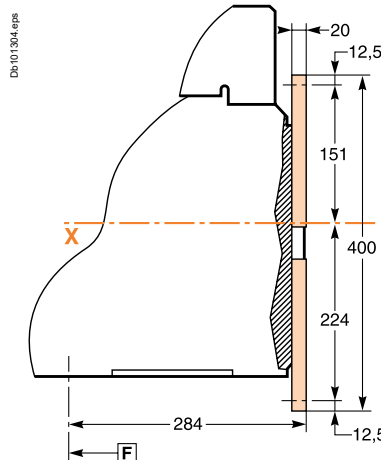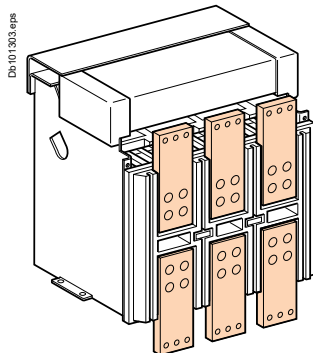

Detail

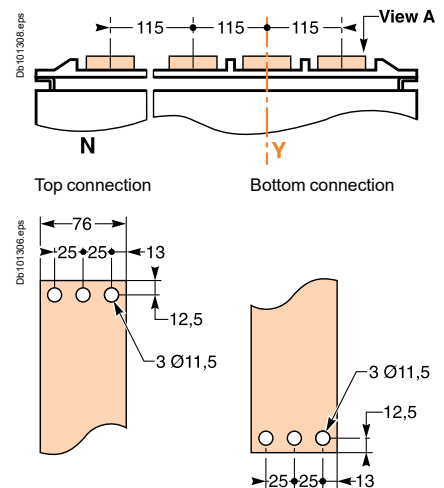

Note: recommended connection screws: **M10** class 8.8.
Tightening torque: **50 Nm** with contact washer.