
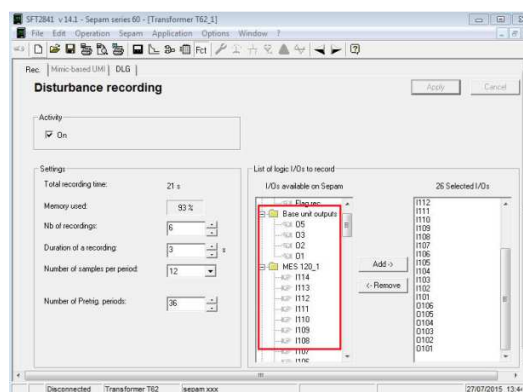




What are the data and logical states recordable, in Disturbance recording for Sepam range 60 and 80?

Item	Sepam Sereis	Description
1	60 & 80	all logic inputs / outputs
2	60 & 80	all GOOSE logic inputs G401 to G416 and G501 to G516
3	60 & 80	pick-up signal
4	60 & 80	1 data item configurable by the logic equation editor (V_FLAGREC)
5	80	15 data items configurable by Logipam (V_FLAGREC, V_FLAGREC2 to V_FLAGREC15)

For item 1, when we assign Input/ Output module we have option of recording each input and output.

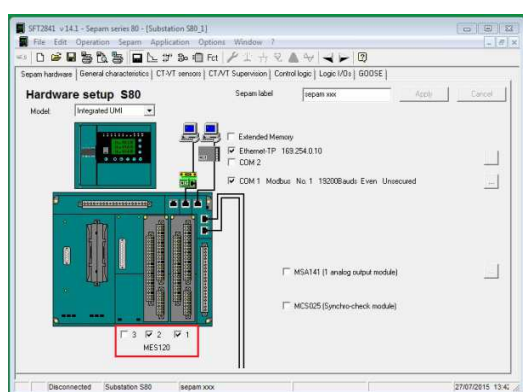

For item 2, when we assign Ethernet option we have option of recording each GOOSE.

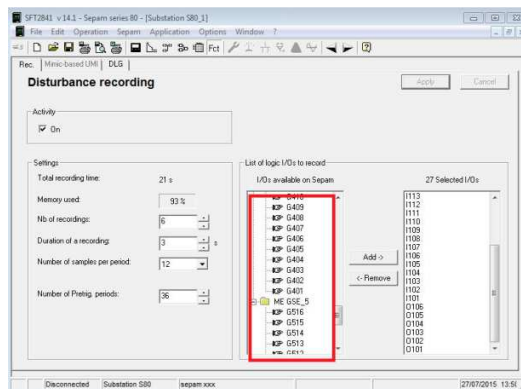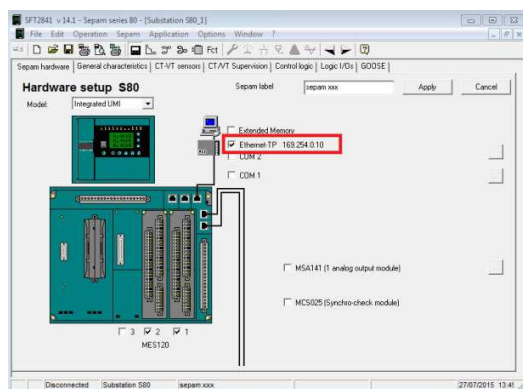

For item 3, it is assigned by default.

For item 4 and 5, there is another FAQ, FAQ No.FA253767 , which is explaining why we use V_FLAGREC and how to assign them.

AEDL3