


Load a New License File onto the Device?

A new license file may be provided by Schneider Electric or a representative; typically if new features are purchased for the rPAC or RTU.

If the file contents are altered, the device cannot process it.


The license file has the extension ".LIC" and needs to be loaded onto the device.

This can be done by using the SCADAPack E Configurator **Transfer > Activate License File** command.

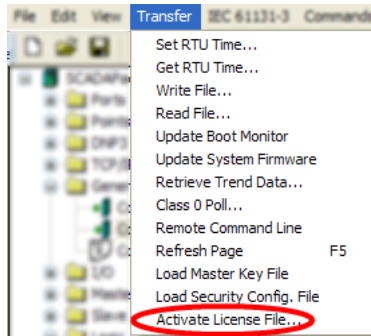


Activate Licence File

When this command is issued, you are prompted to select the license file to download to the SCADAPack E Smart RTU. SCADAPack E License files use the file extension .LIC. The dialog displays these files by default. RTU License files are created and signed by Schneider Electric or a representative.

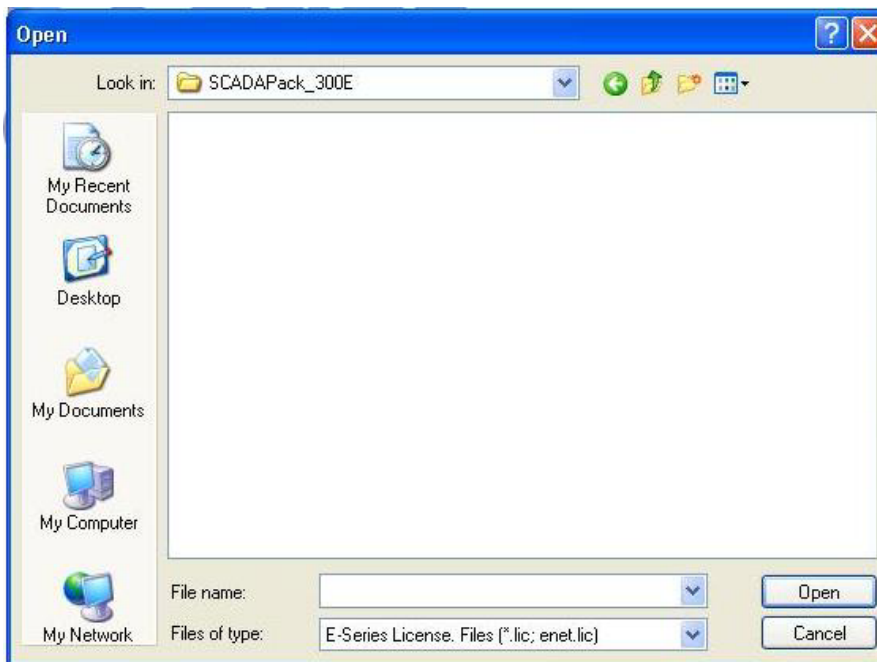

- Select **Open** to start the file transfer and execution of the selected license file.
- Select **Cancel** to cancel the command.

During the file transfer a progress indicator is displayed:

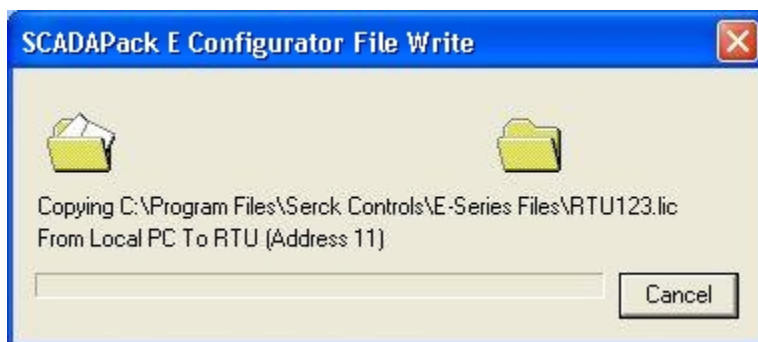

If the transfer was successful, a dialog similar to that below is displayed. The RTU needs to be restarted after executing this command for the licensed features to be activated.

