



STRAP ON

Non-Intrusive Pipe Mount, Thermistor

The ACI Thermistor Strap-On Series features a 1.5" square copper plate with the sensor encapsulated to the back side of the plate to improve the thermal conductivity between the pipe and the sensor when an Immersion style sensor can't be inserted into the pipe. Each sensor has two, 14 inch 22 AWG Etched Teflon colored lead wires to differentiate the different sensor types. The sensors in this series are manufactured using ACI's proven double encapsulation process to eliminate the effects of moisture upon the sensors as well as to improve the thermal response times using our high quality, thermally conductive epoxy. The Strap-On Series sensors can be used to monitor pipe sizes from 1 1/4" to 10" in diameter. For best accuracy and increased thermal conduction between the pipe and the sensor, ACI

recommends to clean the pipe before applying thermal grease as well as to insulate the sensor from the effects of the ambient air. Optional weather proof enclosure and NIST certificates are available upon request.

Applications: Cold Water Systems, Hot Water Systems, Retrofit, Hydronic Heating Systems, Chillers

The ACI Thermistor Strap-On Series is covered by ACI's Five (5) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, www.workaci.com.

PRODUCT SPECIFICATIONS




Sensor Type Sensor Curve:	Thermistor Non-Linear, NTC (Negative Temperature Coefficient)	
Number Sensing Points:	One	
Number Wires:	Two (Non-Polarity Sensitive)	
Sensor Series Output @ 25°C (77°F) (Lead Wire Colors):	A/1.8K: 1.8KΩ nominal (Red/Yellow)	A/CSI: 10KΩ nominal (Green/Yellow)
	A/3K: 3KΩ nominal (White/Brown)	A/10KS: 10KΩ nominal (White/Blue)
	A/AN (Type III): 10KΩ nominal (White/White)	A/10K-E1: 10KΩ nominal (Gray/Orange)
	A/AN-BC: 5.238KΩ nominal (White/Yellow)	A/20K: 20KΩ nominal (Brown/Blue)
	A/CP (Type II): 10KΩ nominal (White/Green)	A/100KS: 100KΩ nominal (Black/Yellow)
Accuracy 0-70°C (32-158°F):	+/-0.2°C (+/-0.36°F) except A/10K-E1 Series: +/-0.3°C (+/-0.54°F); A/1.8K Series: +/- 0.5°C @ 25°C (77°F) and (+/-1.0°C) (+/-1.8°F)	
Stability:	Sensor Dependent; Contact ACI for more information on specific sensor	
Response Time (63% Step Change):	30 Seconds nominal	
Power Dissipation Constant:	3 mW/°C except A/1.8K Series: 1 mW/°C A/10K-E1 Series: 2 mW/°C	
Enclosure Specifications, Operating	A/XX-S-GD: Galvanized Steel, -40 to 93°C (-40 to 200°F), NEMA 1 (IP 10)	
Temperature Range, Ratings:	A/XX-S-PB: ABS Plastic, -30 to 85°C (-22 to 185°F), UL94-HB, Plenum Rated A/XX-S-4X: Polystyrene Plastic, -40 to 70°C (-40 to 158°F), UL94-V2, NEMA 4X (IP 66)	
Storage Temperature Range:	-40 to 80°C (-40 to 176°F)	
Operating Humidity Range:	10 to 95% RH, non-condensing	
Pipe Mount Sensor Enclosure Material:	14" (35.6cm) 22 AWG (0.65mm)	
Acceptable Pipe Size:	A/X-S-XX: 1 1/4" (32mm) to 4" (100mm); A/X-S10-XX: 2" (50mm) to 10" (250mm)	
Foam Material Flammability Rating:	Neoprene/EPDM/SBR Polymer UL94-HF1; MIL-R-6130C; FMVSS-302	
Lead Length Conductor Size:	A/XX-S-XX: 1 1/4" (32mm) to 4" (100mm) A/XX-S10-XX: 2" (50mm) to 10" (250mm)	
Lead Wire Insulation Wire Rating:	Etched Teflon (PTFE) Colored Leads MIL-W-16878/4 (Type E)	
Conductor Material:	Silver Plated Copper	
Product Dimensions:	See Drawing on Back of Data Sheet	
Product Weight:	A/XX-S-GD: 0.80 lbs. (0.37kg) A/XX-S-PB: 0.40 lbs. (0.18kg) A/XX-S-4X: 0.55 lbs. (0.25kg)	
Agency Approvals:	CE, RoHS2, WEEE	








DIMENSIONAL DRAWING




Plastic Box Enclosure [PB]

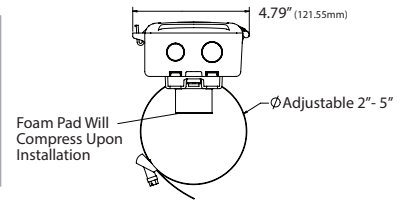

Galvanized Enclosure [GD]

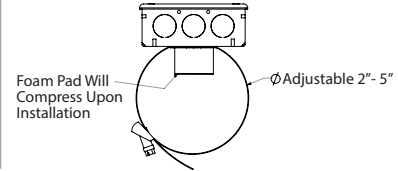

NEMA 4X Enclosure [4X]

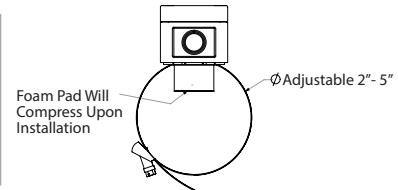

Front View

Right View

Top View

CUSTOM ORDERING

Model # Example: **A/** **1.8K** **S** **PB** **NIST**

MODEL #

A. Sensor Series No Selection Required	A/	A/
B. Model Series Select One (1)	1.8K 3K AN AN-BC CP CSI 10KS 10K-E1 20K 100KS	
C. Configuration Select One (1)	S = Strap-On (1.25" to 4" Pipe Size) S10* = Strap-On (2" to 10" pipe size)	
D. Enclosure Select One (1)	GD = Galvanized PB = Plastic 4X = NEMA 4X Weather Proof	
E. NIST Select One (1)	---- = No NIST Certificate NIST = NIST Certificate (Must Specify 1, 3 or 5 Points)	

Note*: Not available in "NEMA 4X" style enclosure option

ACCESSORIES ORDERING

Model # Example: **A/HOSE CLAMP-2-12"** -OR- **142631**

Model #	Item #	Description
A/HOSE CLAMP-2-5"	142630	Hardware, 2-5" Hose Clamp, Quick Release Worm Gear, 201/301 Stainless Steel
A/HOSE CLAMP-2-12"	142631	Hardware, 2-12" Hose Clamp, Quick Release Worm Gear, 201/301 Stainless Steel
NSG HEAT TRANSFER PASTE 2OZ	102595	Thermal Grease, 2 oz. Tube, Silicone Free, -40 to 320°F (-40 to 160°C)
NSG HEAT TRANSFER PASTE 16OZ	140574	Thermal Grease, 16 oz. Jar, Silicone Free, -40 to 390°F (-40 to 198°C)

