

INSTALLATION / OPERATION INSTRUCTIONS

24 HOUR PROGRAMMABLE TIMER - CTS 24

SAFETY

The equipment must be installed, and maintained by competent personnel in accordance with the appropriate statutory regulations and codes of practice e.g. the current ELECTRICITY AT WORK REGULATIONS, BRITISH STANDARD REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, etc.

Power sources must be electrically isolated, locked off and labelled during installation and maintenance.

It is the responsibility of the installer to ensure that all electrical connections are tight and that satisfactory earthing has been achieved.

These installation instructions must be handed to the end user.

GENERAL


Function

Permits the opening and closing of the relay/timer contacts throughout a predetermined range 15 minutes to 24 hours.


Identification

Legend:

- 1 - Selection ⌚ Auto I ON
- 2 - Programme increments in minimum steps of 15 minutes.
- 3 - Index.

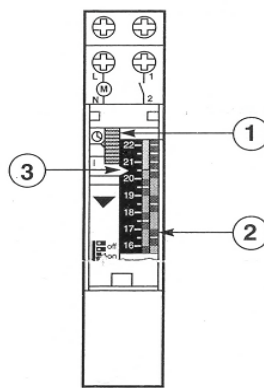

Installation procedure

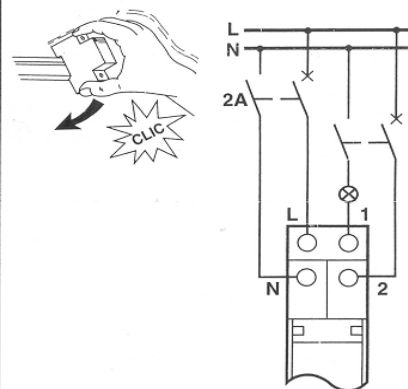

CONTROL


To set the time:

- 1 - Turn the scale in the direction of the arrow to the time required on the dial.



Commutation position:

- 2 - ■ auto
- ON.



Programme setting:

- 3 - "ON" range contacts closed - slide segment to left as required.
- "OFF" range contacts open - slide segment to right as required.

