


Section 9—Plug-In Units—Bus Plugs

Fusible Switch Bolt-On Units—800–1200 A (Type “PTQ”)

Fusible Switch Bolt-On Units—800–1200 A (Type “PTQ”)

NOTE: Horizontally-mounted unit shown. Vertically-mounted units have the same physical box dimensions, but use a different mounting system.

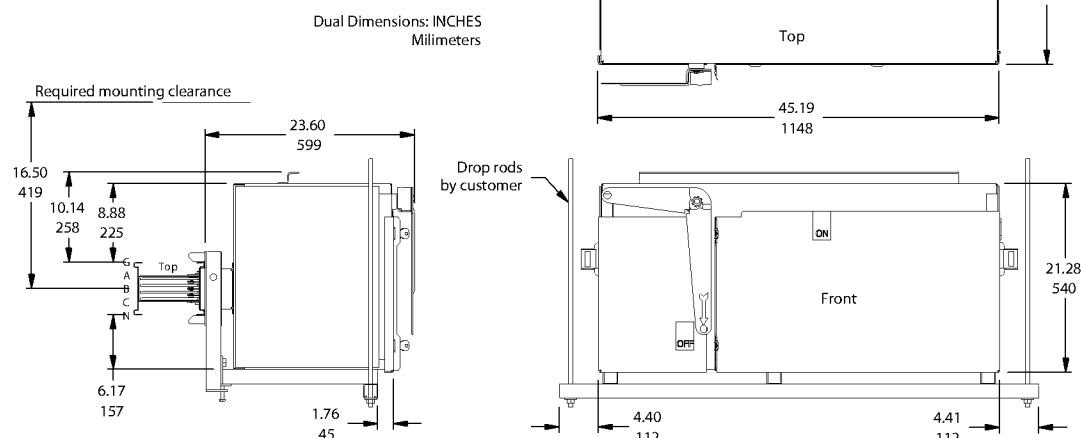

NOTE: Bolt-on units can be used only on plug-in busway (800–4000 A—except 800 A copper I-LINE II) with the same number of poles (e.g., do not use 3-pole unit on 3Ø4W busway, or 3Ø4W unit on 3-pole busway).

Fusible Switch Bolt-On Units — 800–1200 A (Type “PTQ”) Specifications

Fusible Switch		Weight		Lugs Per Phase and Neutral		Ground Lugs	
Cat. No. Prefix	Ampere Rating	Lb	Kg	Qty.	Size	Qty.	Size
PTQ ¹	800	280.00	127	3	3/0-500	4	#6-300
	1000	310.00	140	4		4	
	1200	310.00	140	4		4	

NOTE: This unit requires a special hanger that is mounting orientation specific. Add “H” on the end of the catalog number for units that will be mounted horizontally, and “V” for units that will be mounted vertically. These mounting frames are NOT interchangeable.

¹ “PTQ” units plug into one opening, but require space equal to three plug-in openings. See dimension A.

NOTE: These units are available with the IP54 option, using the same enclosure dimensions as shown above.