


## EASERGY HU250 LAN AND WAN NETWORK INTERFACES

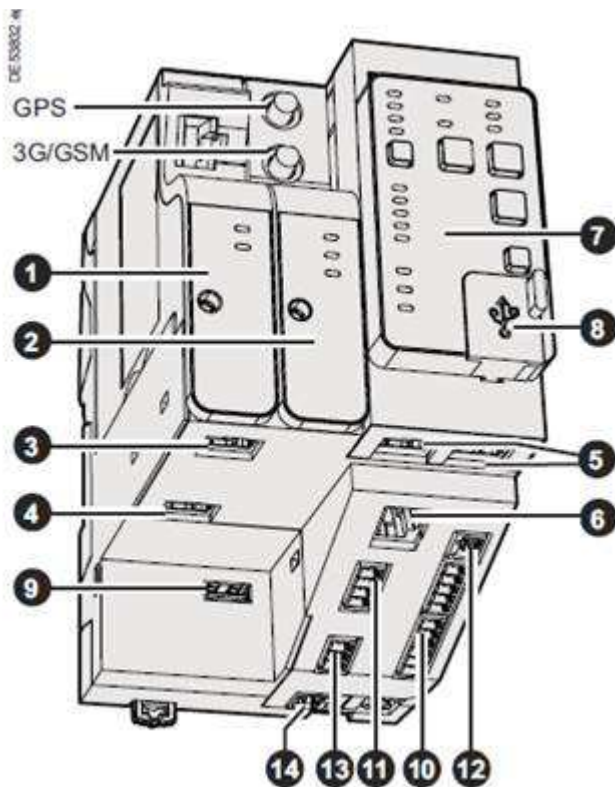

- The "LAN" network interface is the physical double socket - number 5.
- The "WAN" network interface controls both the physical single sockets - number 3 (3rd party devices) and number 4 (SCADA).

With the V1 software, today there is no separation of the IP traffic on these two physical ports.

It is technically feasible to do this, but it hasn't been implemented.

### In the future:

As a gateway device, in order for the Easergy T300 to keep the remote and local IP traffic separate, port 3 for third party devices will get its own interface e.g. LAN2