


Protection components

Thermistor protection units
for use with PTC thermistor probes ⁽¹⁾

LT3 S protection unit/thermistor probe combination

Guaranteed operating zones: examples with 3 probes type DA1 TT●●● (250 Ω at 25 °C) in series, conforming to standard IEC 60034-11, Mark A.

LT3 SE, LT3 SA, LT3 SM protection units

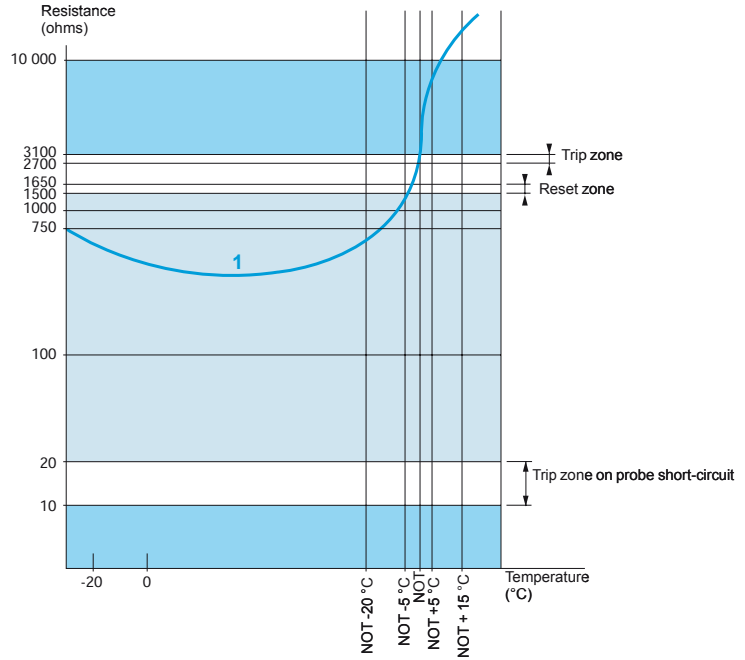

1 3 probes type DA1 TT●●● (250 Ω at 25 °C) in series.

NOT: Nominal Operating Temperature

- Protection unit tripped.
- Protection unit reset.

⁽¹⁾ PTC: Positive Temperature Coefficient