


Step 3 Select outgoing devices (cont.)




32/160A Switch-disconnector-fuse devices 50kA - 400A boards only

				Fuse link fitted	BS88 fuse links accepted
32A	Triple pole	PF32	3 modules	AA032	A1, A2
63A	Triple pole	PF63	4 modules	BA063	A2, A3
100A	Triple pole	PF100	5 modules	CEO100	A2, A3, A4 (max dia 32mm)
160A	Triple pole	PF160	5 modules	DEO160	A2, A3, A4

Dimensions (mm)


Size 1 250A

Depth: 184

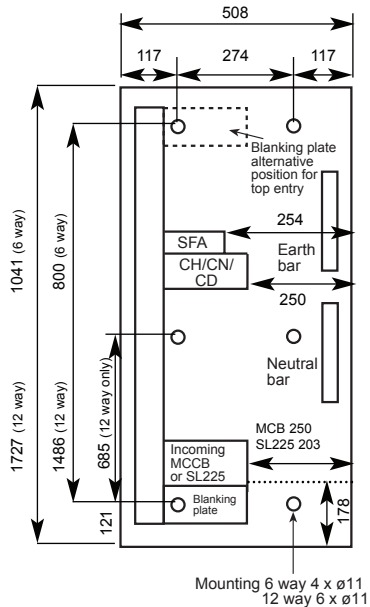


Size 1 400A

Depth: 258

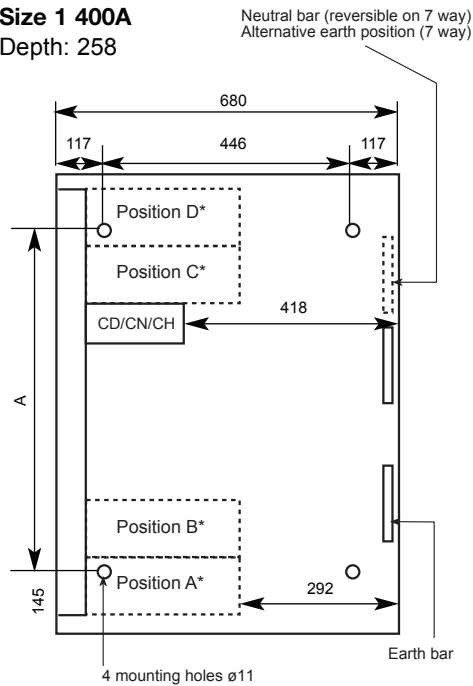

* Alternative positions for main incoming MCCB's.

MFS400

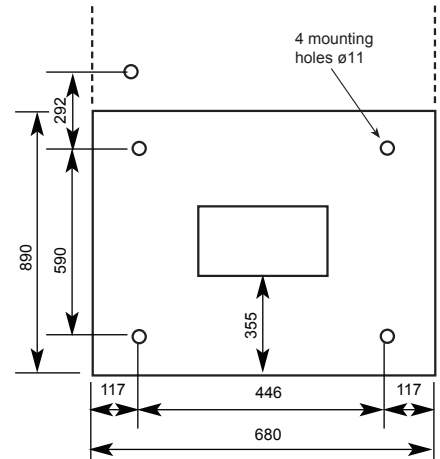

Step 4 Select accessories

Panelboard	MP25061	MP250121	MP40041	MP40071	MP400121
Blanking plates for all unused ways					
Single pole	HNM1BL	HNM1BL	HNM1BL	HNM1BL	HNM1BL
Triple pole	HNM4BL	HNM4BL	HNM4BL	HNM4BL	HNM4BL
Blanking plates for every mccb way when one or more PF devices fitted					
Single pole			HNF1BL	HNF1BL	HNF1BL
Triple pole			HNF4BL	HNF4BL	HNF4BL
Trim, required when 250A incomer fitted			TKA4	TKA7	TKA12
Side extension box					
508mm wide	EXMS20411	EXMS20681			
550mm wide			EXMS827	EXMS1170	EXMS1742
Top / bottom extension box					
226mm high	EXS91	EXS91			
379mm high			EXS151	EXS151	EXS151
MCCB Incomer padlocking device					
250A	W29370	W29370	W29370	W29370	W29370
400A			HPALM	HPALM	HPALM
Door lock					
2 Spare keys	QOKSB	QOKSB	QOKSB	QOKSB	QOKSB
	KQK33	KQK33	KQK33	KQK33	KQK33
Plug-on metering kit for incoming supply - occupies 4 modules					
Analogue, voltmeter & ammeter	MP250INS	MP250INS	MP400INS	MP400INS	MP400INS
Digital, multi function meter	MP250kW	MP250kW	MP400kW	MP400kW	MP400kW
Weight in kg	46	76	44	74	100
Overall dimensions H x W x D	1041x508x184	1727x508x184	827x680x258	1170x680x258	1742x680x258
Fixing centres: vertical dimension (A)	800	1486	533	876	1448

For MCCB accessories and descriptions of the above see page 19

Connections

1, 2 pole	16-32A	2.5-25mm ²
	40-100A	2.5-50mm ²
3 pole	16-100A	M6 bolt
	125-250A	M8 bolt
	400A	50-300mm ²
SW-disconnector	400A	M12 bolt

Earth and neutral bars

Earth bonding connection M6 bolt	
Earth bar connection holes	14x6.5ø, 2x8.5ø, 3x10.5ø, 3x3.9ø
Main neutral connection	M8 bolt
Neutral bar connection holes	10x6.5ø, 2x8.5ø, 3x3.9ø