

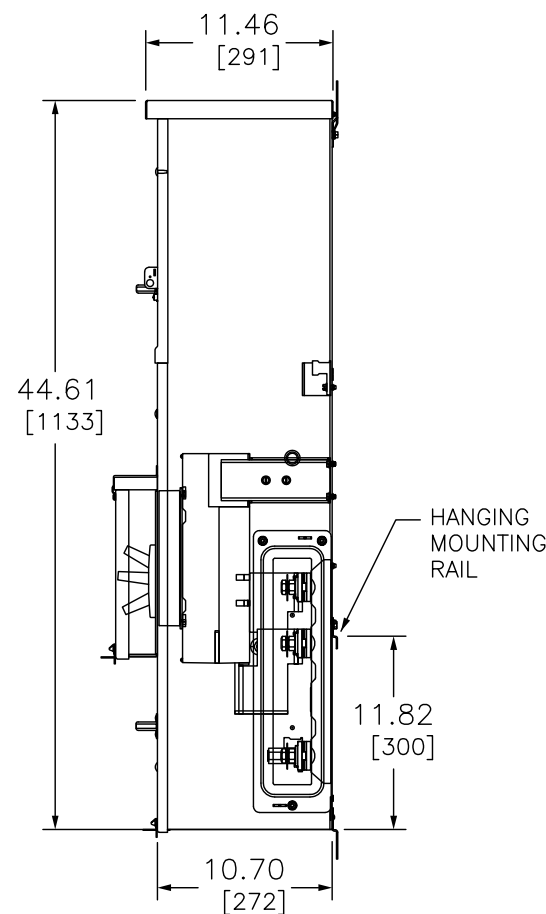
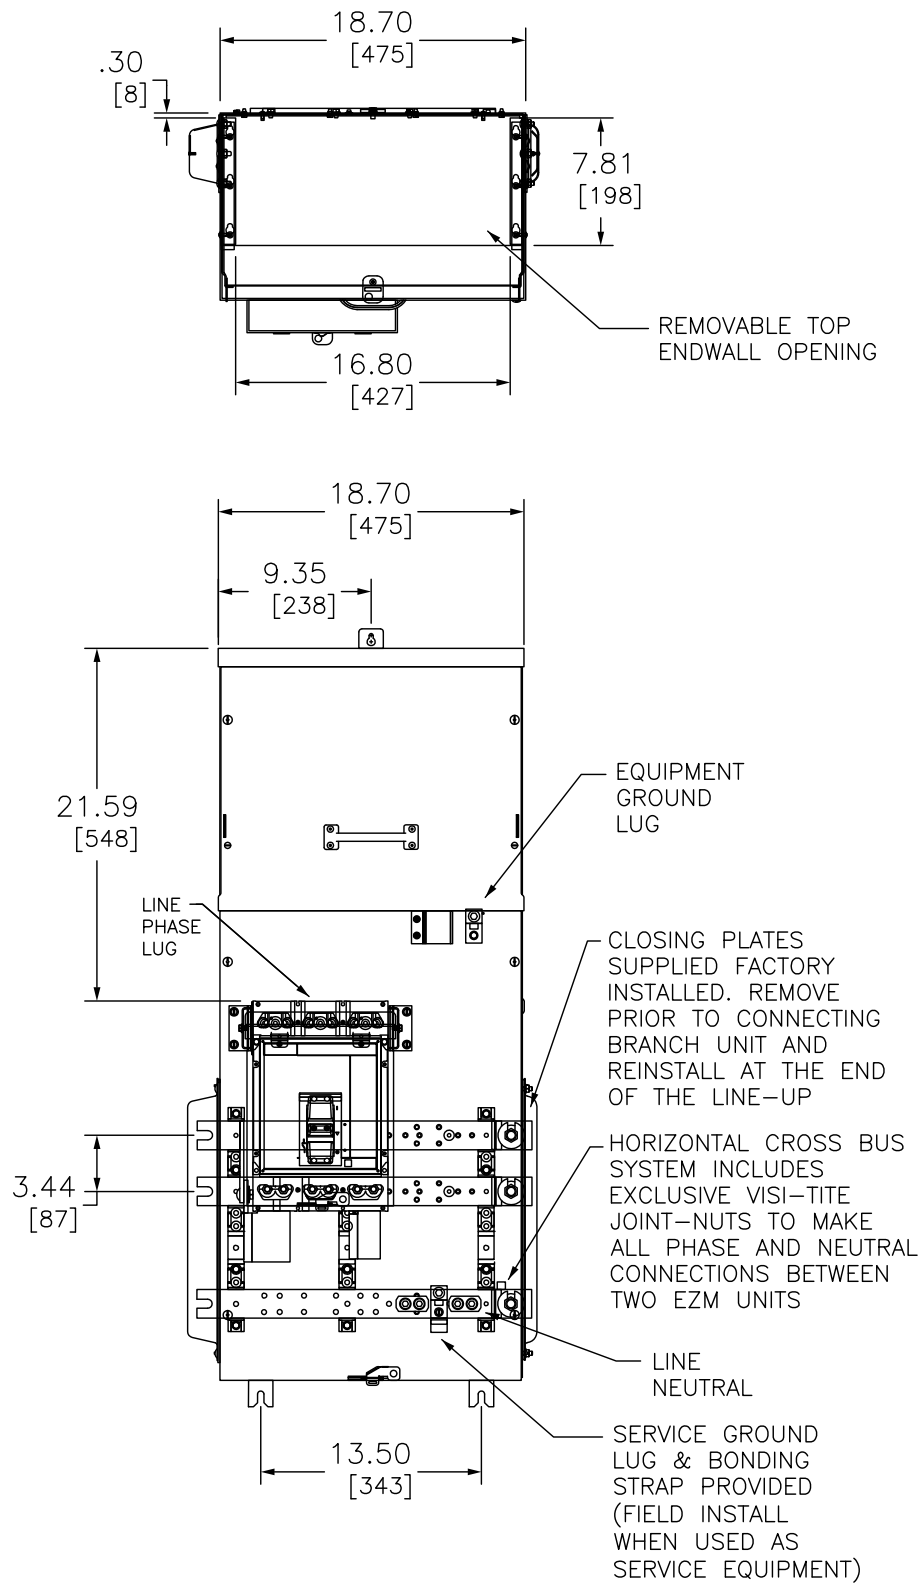


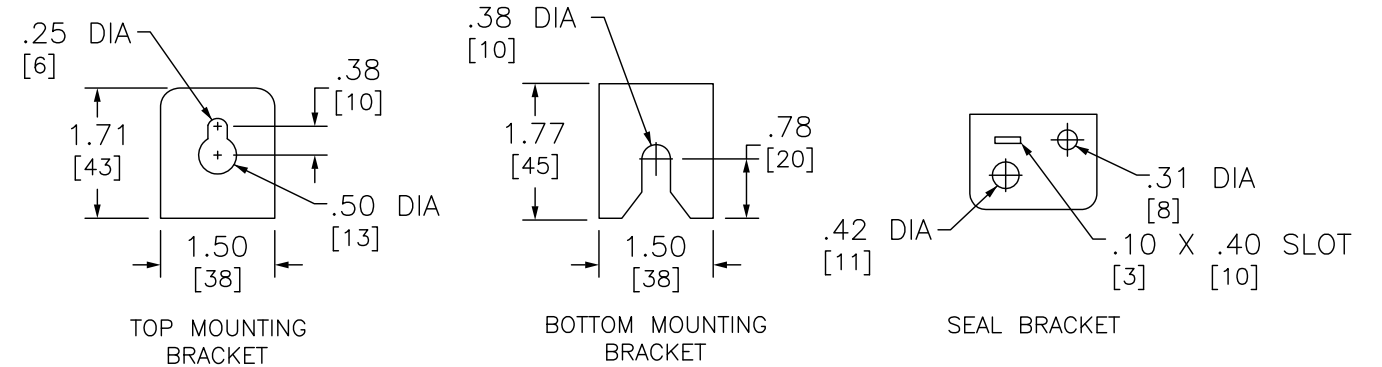

- ADDITIONAL NOTES:
- ◆ ALTERNATE LUG KITS ARE AVAILABLE FOR USE ON LINE SIDE OF MOLDED CASE CIRCUIT BREAKER (REFER TO DIGEST 176, PAGE 7-42).
 - ▼ ALTERNATE NEUTRAL LUG AVAILABLE, ORDER ONE (1) KIT, MMLK250 FOR (1) 1/0 AWG-600 KCMIL OR (2) #1/0 AWG-250 KCMIL AL/CU (KIT INCLUDES THREE, 2-BARREL LUGS), NEUTRAL WILL ACCOMMODATE TWO, 2-BARREL LUGS ONLY.

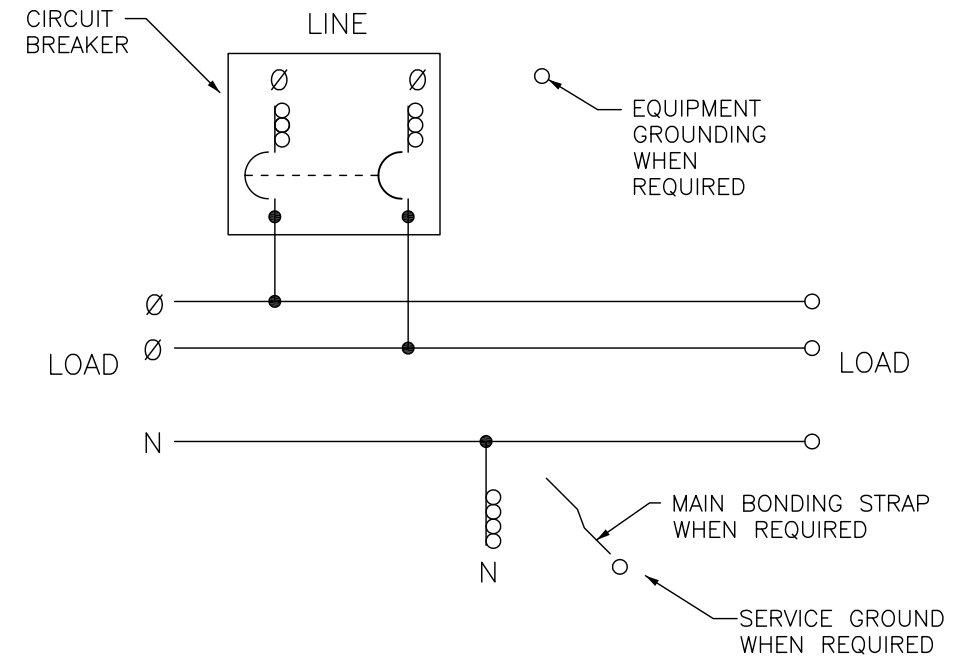

DUAL DIMENSIONS: INCHES
MILLIMETERS

SYSTEM TYPE	MAIN RATING (AMPERES)	CATALOG NUMBER	MAIN CIRCUIT BREAKER (FACTORY INSTALLED)	LINE SIDE PHASE LUG WIRE RANGE FOR AL OR CU CONDUCTORS (SUPPLIED WITH BREAKER)	LINE SIDE NEUTRAL LUG WIRE RANGE FOR AL OR CU CONDUCTORS (FACTORY INSTALLED)	GROUND LUG WIRE RANGE (FACTORY INSTALLED)
1Ø 3W 120/240VAC	600	EZM1600GCBT	MGM26600 (65kA)	(3) 3/0-500 ◆	(4) 3/0-500 ▼	(1) #6-300
	600	EZM1600JCBT	MJM26600 (100kA)	(3) 3/0-500 ◆	(4) 3/0-500 ▼	(1) #6-300
	800	EZM1800GCBT	MGM26800 (65kA)	(3) 3/0-500 ◆	(4) 3/0-500 ▼	(1) #6-300
	800	EZM1800JCBT	MJM26800 (100kA)	(3) 3/0-500 ◆	(4) 3/0-500 ▼	(1) #6-300

NOTES:

FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.

UL LISTED - FILE E-10582, VOL. M, E131840, VOL M

SUITABLE FOR USE AS SERVICE EQUIPMENT.

MAIN HORIZONTAL CROSS BUS RATED AT 800 AMPERES.

MAIN DEVICES ARE SEALABLE BY UTILITY.

GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY.

(NOT SUITABLE FOR FLOOR STANDING EQUIPMENT.)

WHEN USED AS SERVICE EQUIPMENT, INSTALL BONDING STRAP AND REINSTALL GROUND LUG WHERE APPROPRIATE.

EZ METER-PAK GANGABLE
MULTI-METERING EQUIPMENT
600A-800A 1PH 3W MAIN CIRCUIT BREAKER DEVICES
OVERHEAD FEED ONLY
RAINPROOF NEMA TYPE 3R ENCLOSURES

SQUARE D
by **Schneider Electric**

DWG# PWFDS-SYRS-0099
NO.