




KNOCKOUTS	
SYMBOL	CONDUIT SIZE IN MM
A	.50 13
B	.75 19
E	1.50 38
F	2.00 51
G	2.50 64
H	3.00 76
I	3.50 89
J	4.00 102


ADDITIONAL NOTES:
 WHEN USED AS SERVICE EQUIPMENT, INSTALL BONDING STRAP, AND REINSTALL GROUND LUG WHERE APPROPRIATE.
 ● HANDLE EXTENSION AVAILABLE. ORDER KIT AHEXL1, HANDLE IS HINGED, ALLOWING IT TO BE TUCKED UNDER THE DOOR ON THE COVER.
 ▲ THIS LUG IS AVAILABLE FROM SQUARE D. ORDER CATALOG NUMBER CMLK4, KIT INCLUDES 4 LUGS.
 ‡ INDICATED VERSA-CRIMP CRIMPING TOOL.

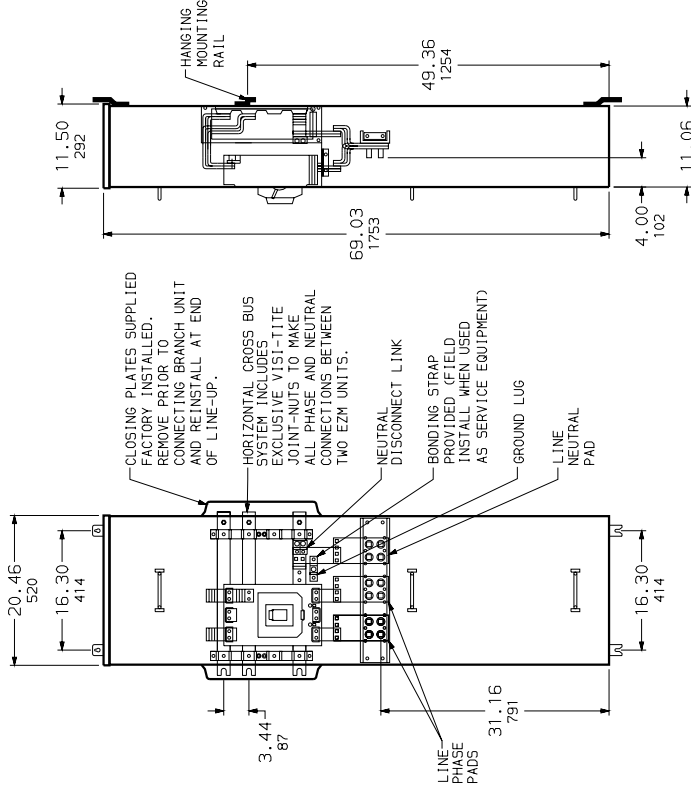

TOP MOUNTING BRACKET



BOTTOM MOUNTING BRACKET



SEAL BRACKET

DUAL DIMENSIONS: INCHES
MILLIMETERS

ALTERNATE LUG QUANTITY PER LINE SIDE PHASE AND NEUTRAL TERMINALS (ORDER SEPARATELY)		ANDERSON		ILSCO		CMC	
CATALOG NUMBER		VHCL-600-12BN 250-600 CU	VHCL-750-12BN 500-750 CU	L102-600 #2-600 AL/CU	2ACL-600 250-600 AL/CU	AU-600-2N ▲ #2-600 AL/CU	A1B2-600-2 (2 BARREL) #2-600 AL/CU
EZM1600CBU	2	VC-6 ‡	VC-7 ‡	MECH	IDT-12	MECH	MECH
EZM1800CBU	2	VC-6 ‡	VC-7 ‡	MECH	IDT-12	MECH	MECH

SYSTEM TYPE	MAIN RATING (AMPERES)	CATALOG NUMBER	MAIN CIRCUIT BREAKER (FACTORY INSTALLED)	LINE PHASE AND NEUTRAL LUG LANDING PADS PROVIDED FOR USE WITH CRIMPING TOOL. QUANTITY OF LUGS PER PAD	GROUND LUG WIRE RANGE (FACTORY INSTALLED)
1 Ø 3W 120/240VAC	600	EZM1600CBU	MHF26600 ●	2 (ORDER LUGS SEPARATELY)	(1) #6-300
	800	EZM1800CBU	MHF26800 ●	2 (ORDER LUGS SEPARATELY)	(1) #6-300

NOTES:
 FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.
 UL LISTED - FILE E-10582, VOL. M, E-131840, VOL. M
 SUITABLE FOR USE AS SERVICE EQUIPMENT.
 MAIN HORIZONTAL CROSS BUS RATED AT 800 AMPERES.
 GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY.
 (NOT SUITABLE FOR FLOOR STANDING EQUIPMENT.)
 *MEETS EUSERC STANDARDS FOR WEST COAST BASED UTILITIES.

SQUARE D COMPANY

EZ METER-PAK GANGABLE
MULTI-METERING EQUIPMENT
600A/800A 1Ø, 3W MAIN CIRCUIT BREAKER DEVICES
UNDERGROUND FEED ONLY
RAINPROOF NEMA TYPE 3R ENCLOSURES

DWG. NO. 3114