

Additional characteristics




<i>Functions and characteristics</i>	<i>A-1</i>
<i>Installation recommendations</i>	<i>B-1</i>
<i>Dimensions and connection</i>	<i>C-1</i>
<i>Electrical diagrams</i>	<i>D-1</i>
Tripping curves	E-2
<i>Catalogue numbers and order form</i>	<i>F-1</i>




Tripping curves


ET range of trip system - 2I

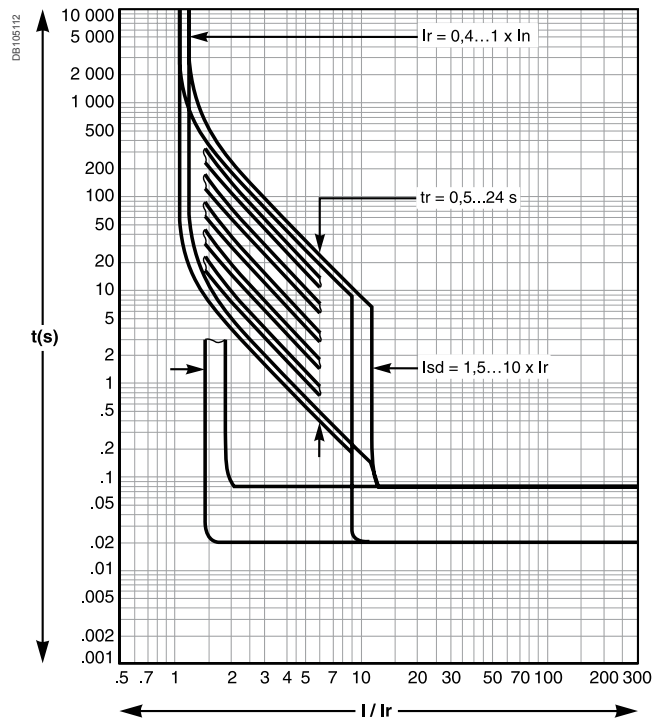

ET range of trip system - 5S, 6G

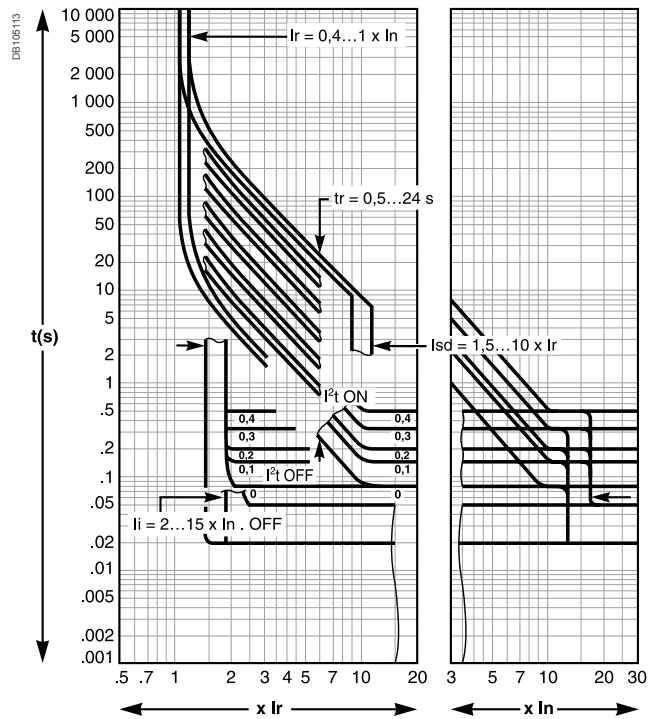

Earth fault protection (ET range of trip system - 6G)

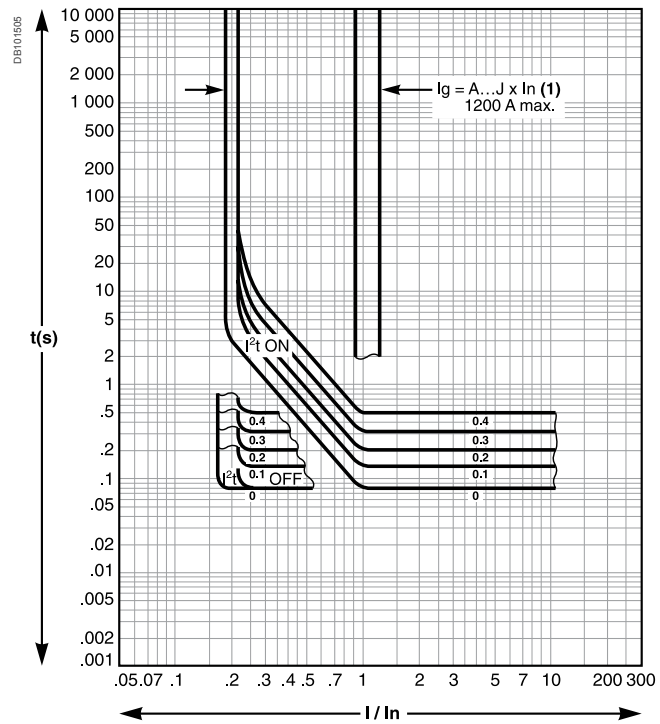

(1)

$I_g = \ln x...$	A	B	C	D	E	F	G	H	I
$\ln \leq 400 \text{ A}$	0.3	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
$400 \text{ A} < \ln \leq 1000 \text{ A}$	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
$\ln \geq 1250 \text{ A}$	500	640	720	800	880	960	1040	1120	1200