
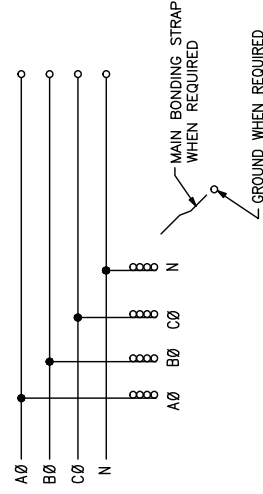
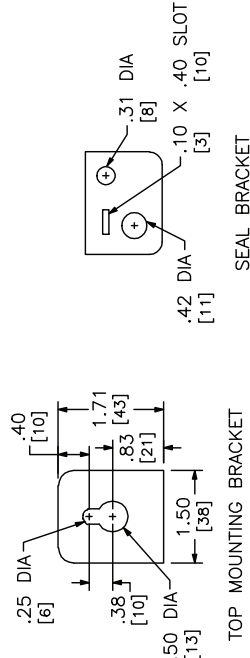


ADDITIONAL NOTES:
WHEN USED ON THE LINE SIDE OF SERVICE EQUIPMENT, INSTALL BONDING STRAP AND REINSTALL GROUND LUG WHERE APPROPRIATE.

1

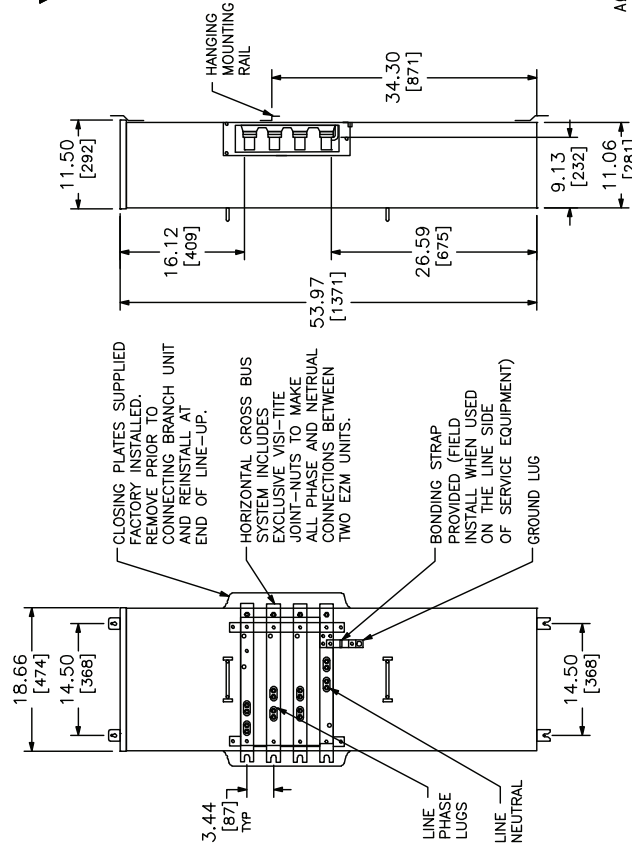

DUAL DIMENSIONS:

TERMINAL BOX CAN BE FED FROM AN
UPSTREAM SERVICE DISCONNECT AND ATTAIN
A SHORT CIRCUIT CURRENT RATING BASED
ON OVERCURRENT PROTECTION
PROVIDED AS FOLLOWS:

CLASS R FUSE (600A MAX)	100K
CLASS T FUSE 300VAC (800A MAX)	100K
SQUARE D BREAKER TYPE LH, MH, OR PA RATED 65K	65K
SQUARE D BREAKER TYPE LA OR MA RATED 42K	42K

SYSTEM TYPE	MAIN RATING (AMPERES)	CATALOG NUMBER	LINE PHASE AND NEUTRAL LUG WIRE RANGE FOR AL OR CU CONDUCTORS (FACTORY INSTALLED)	GROUND LUG WIRE RANGE (FACTORY INSTALLED)
3Ø 4W 208Y/120VAC OR 240/120VAC DELTA	800	EZM3800TB	(4) 3/0-500 ▼	(1) #6-300

NOTES:
FINISH: — GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEAL STEEL.
UNLISTED FOR USE ON THE LINE SIDE OF SERVICE EQUIPMENT.
MAIN HORIZONTAL CROSS BUS RATED AT 800 AMPERES.
MAIN DEVICES ARE SEALABLE BY UTILITY.
GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY.
(NOT SUITABLE FOR FLOOR STANDING EQUIPMENT).

SQUARE D
Schneider Electric

EZ METER-PAK GANGABLE
MULTI-METERING EQUIPMENT
800A 3PH 4W MAIN LUGS TERMINAL BOXES
OVERHEAD/UNDERGROUND FEED
RAINPROOF NEMA TYPE 3R ENCLOSURES

DWG# 3148
NO.