
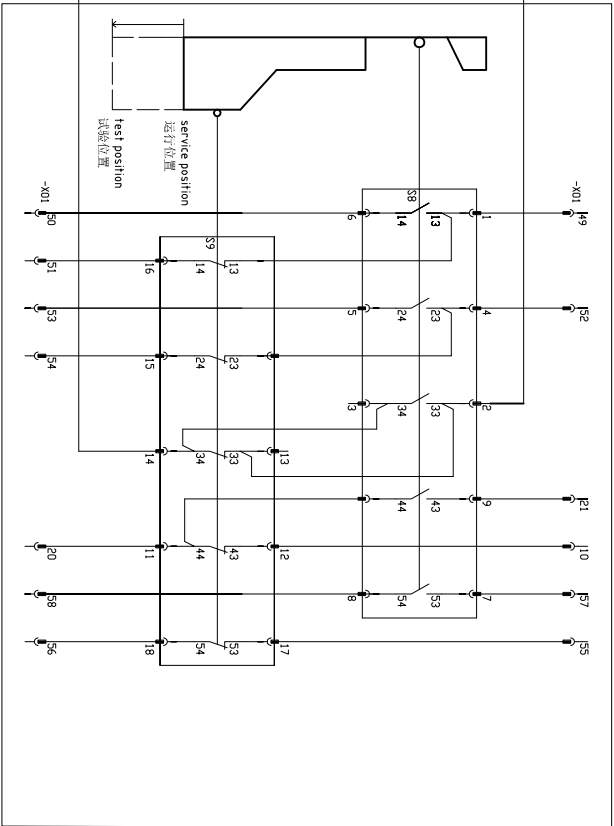


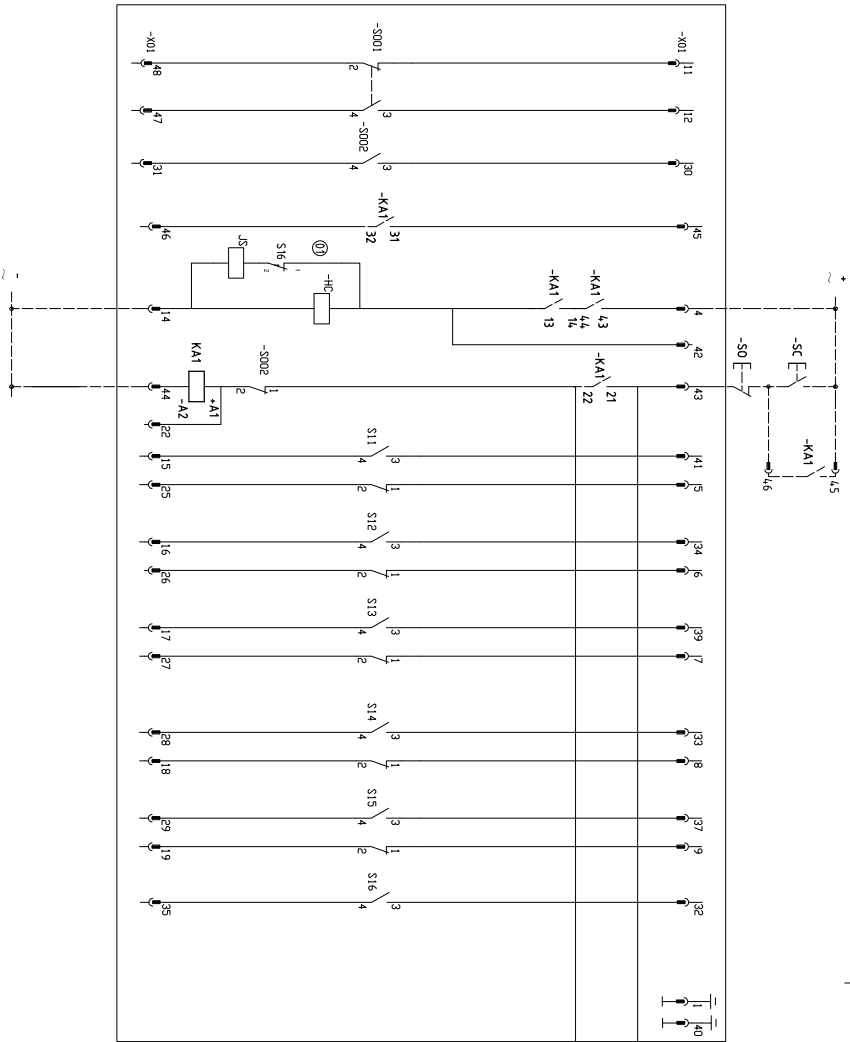

contactor shown in opening position,trolley is in service position,
fuse strike mechanism is showed at not yet operated postion.

接触器处于分闸位置,手车处于工作位置,熔断器处于未熔断状态

S11-16 Micro switch for contactor position indicator

S11-16 接触器位置微动开关

S001-002Micro switch for fuse blowing indicator

S001-002 熔断器指示微动开关

S8 Test position switch

S8 试验位置限位开关

S9 Service position switch

S9 工作位置限位开关

X01 58 pins low voltage plug

X01 58芯航空插

HC Closing electromagnet

HC 合闸电磁铁

SC Button for closing

SC 合闸按钮

S0 Button for opening

S0 分闸按钮

KA1 Contactor

KA1 中间继电器

JS Counter

JS 计数器

parts and wirings connected by dashed are up to
the customer

虚线部分器件及接线由用
户自备

NOTE			
CVX for DEM58 pin low voltage plug (Magnetically held)			
CVX for DEM58 pin low voltage plug (电磁铁)			

Material	General Tolerances	Surface Treatment	Thermal Treatment
Materia	Tolérances Général	Traitement de surface	Traitement thermique
Versteile	Algemeine Toleranzen	Oberflächenbehandlung	Wärmebehandlung
NONE	None	None	None
Rev.	N°	Date/Datum	Creation/Revision
01	ASX001131M	2014/09/15	Date/Datum: 2014/09/15
00	ASX001131M	2014/08/20	Name/Nom: Lly Luo
N° Project / Proje		Technical Description	
A2H		Quality Protection	
3		WIRING	
1/1		WIRING	
Schneider Electric		ASX	
Schneider Electric		AVX002062-03	
Revision		01	
Approval			