

Local signalling	LED yellow accessing CF system card (DISK) Multi-colour LED power
Width	402 mm
Height	301 mm
Depth	72 mm
Product weight	6.04 kg

Environment

IP degree of protection	IP65 (front panel) conforming to EN/IEC 61131-2
Product certifications	Marine GL Bridge with line filter HMIYLFIMAR11 REACH C-Tick CE GOST CULus HazLoc Class I Division 2 CSA 22-2 No 213 CULus HazLoc Class I Division 2 ANSI/ISA 12-12-01 CULus HazLoc Class I Division 2 UL 1604 CULus CSA 22-2 No 142 CULus 508
Standards	UL 508 IEC 61000-6-2 FCC Class A EN 61131-2
Pollution degree	2 conforming to EN/IEC 61131-2
Electromagnetic compatibility	Immunity to electromagnetic emissions conforming to EN 55011 class A Immunity to electromagnetic emissions conforming to EN 55022 class A Immunity to high frequency interference conforming to EN/IEC 61000-4-x Immunity to high frequency interference conforming to EN/IEC 61131-2
Ambient air temperature for operation	0...50 °C vertical installation conforming to UL 508 0...50 °C vertical installation conforming to EN/IEC 61131-2
Ambient air temperature for storage	-20...60 °C conforming to IEC 60068-2-14 test Na -20...60 °C conforming to IEC 60068-2-2 test Bb
Relative humidity	10...85 % conforming to EN/IEC 60068-2-30 Db 10...85 % conforming to EN/IEC 60068-2-78
Operating altitude	2000 m conforming to EN/IEC 61131-2
Vibration resistance	0.7 gn (f = 13.2...100 Hz)continuous conforming to EN/IEC 60068-2-6 Fc 1 mm (f = 3...13.2 Hz)continuous conforming to EN/IEC 60068-2-6 Fc 1 gn (f = 9...200 Hz)intermittently conforming to EN/IEC 60068-2-6 Fc 0.5 gn (f = 9...200 Hz)continuous conforming to EN/IEC 60068-2-6 Fc 3.5 mm (f = 2...9 Hz)intermittently conforming to EN/IEC 60068-2-6 Fc 1.75 mm (f = 2...9 Hz)continuous conforming to EN/IEC 60068-2-6 Fc
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27, Ea tests


Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 1148 - Schneider Electric declaration of conformity

Contractual warranty

Period	18 months
--------	-----------

Dimensions

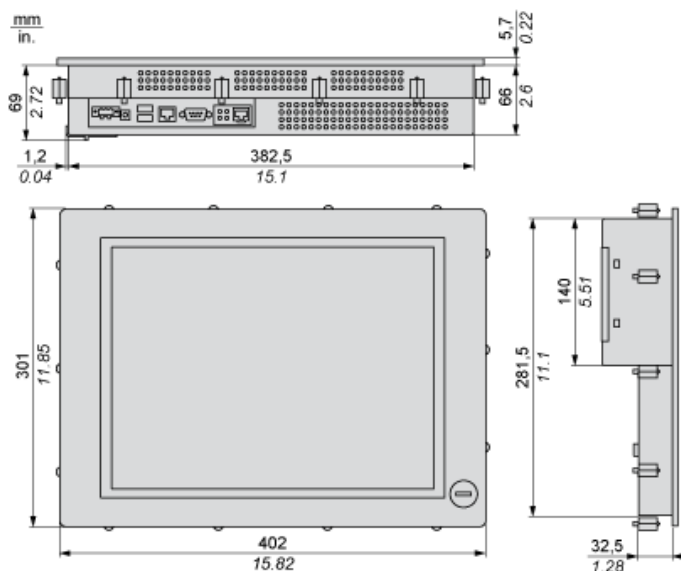


Mounting Information


Spacing Requirements

Side View	Rear View
x1 > 100 mm (> 3.93 in.) x2 > 50 mm (> 1.96 in.) x3 > 10 mm (> 0.39 in.)	

Mounting Orientation



Panel Cut Dimensions

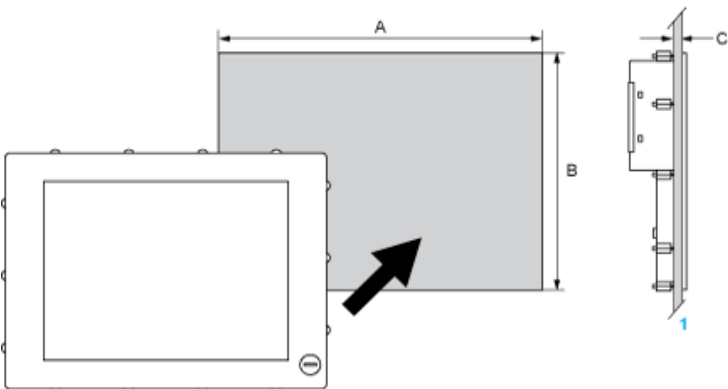

1 Installation panel

A	B	C
383.5 + 1/- 0 mm (15.10 + 0.04/- 0 in.)	282.5 + 1/- 0 mm (11.12 + 0.04/- 0 in.)	1.6...10 mm (0.06...0.39 in.)