



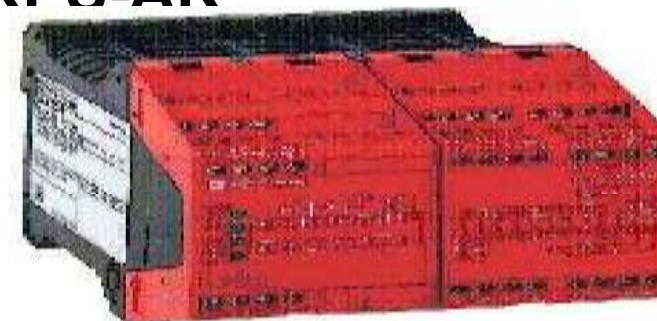

XPS-APF Replaced by XPS-AR

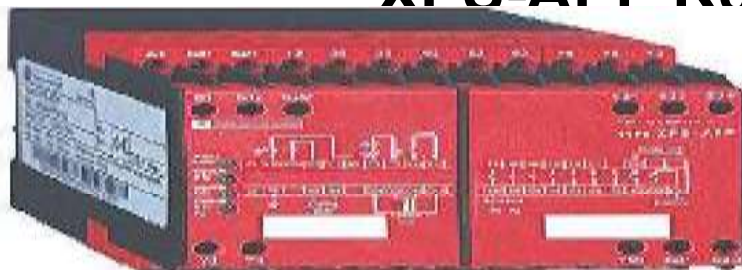

Differentiation


- XPS-AR has 2 extra solid state outputs for PLC signalling
- XPS-AR has choice of removable plug terminals
- XPS-AR has 1 extra N/O safety outputs
- XPS-AR cannot monitor safety mats or edges
- XPS-APF can be used for Type III A two-hand control monitoring



XPS-APF Replaced by XPS-AR

Schematic Comparison

Monitoring of E-stop with 2N/C contacts

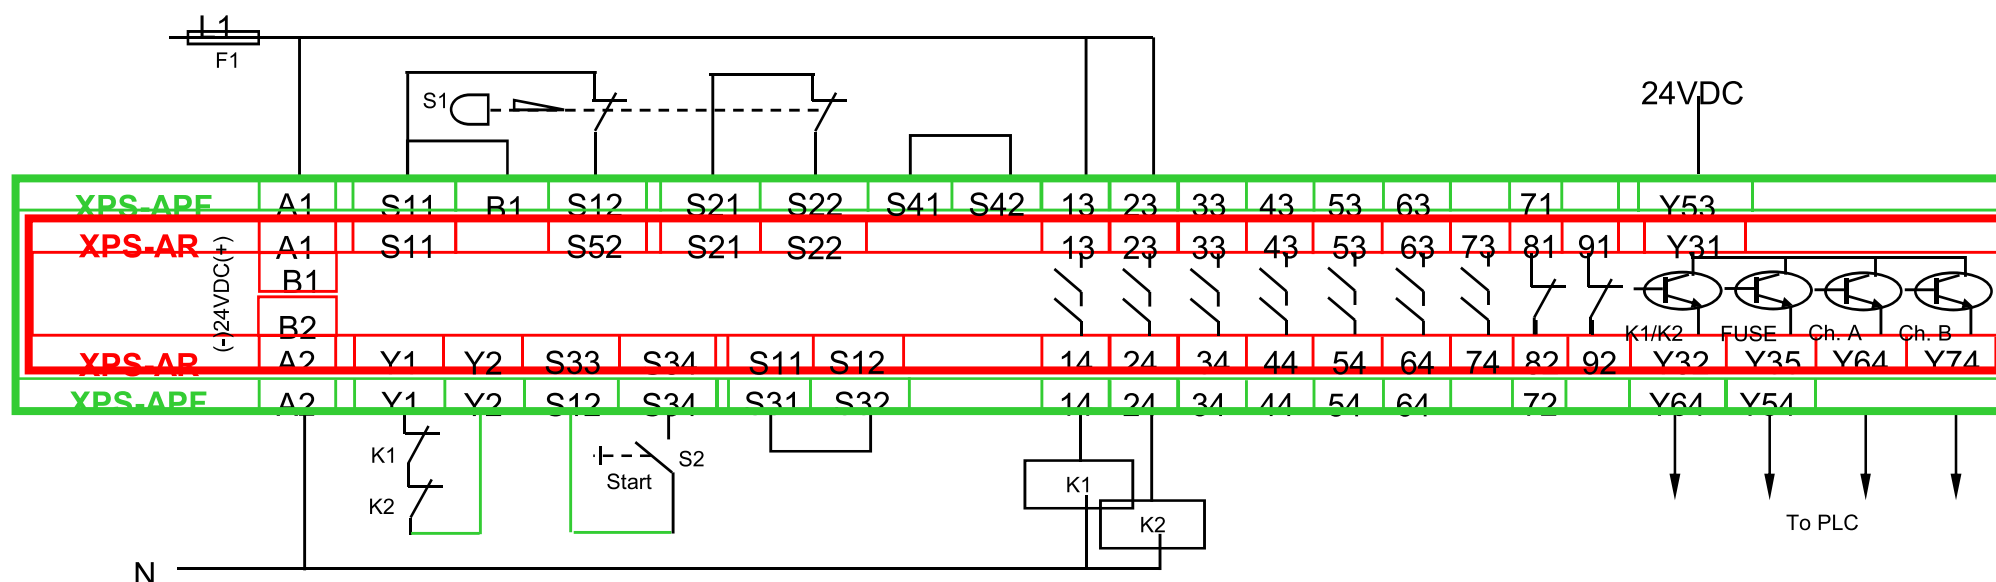



XPS-APF Replaced by XPS-AR

Cross Reference Table

Supply Voltage	Obsolete Reference	Existing Reference *
24VAC/DC	XPS-APF5142	XPS-AR311144
48VAC/DC	XPS-APF5342	-
120VAC	XPS-APF3442	XPS-AR351144
230VAC	XPS-APF3742	XPS-AR371144
*add P to reference for removable plug terminals		