


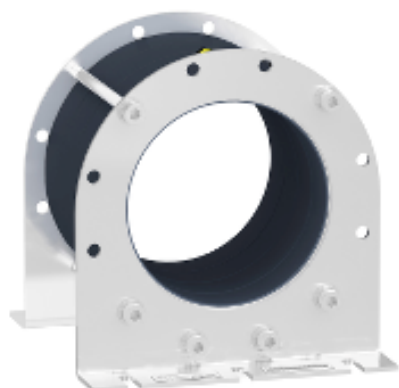

Main

Product or component type	Common mode output filter
Range compatibility	Altivar Process ATV600 Altivar Process ATV900
Value of inductance	183.2 μH
Product compatibility	Variable speed drive ATV630 wall mount, motor: 110...160 kW, 380...480 V Variable speed drive ATV650 wall mount, motor: 110...160 kW, 380...480 V Variable speed drive ATV930 wall mount, motor: 110...160 kW, 380...480 V Variable speed drive ATV950 wall mount, motor: 110...160 kW, 380...480 V Variable speed drive ATV630 wall mount, motor: 55...75 kW, 200...240 V Variable speed drive ATV930 wall mount, motor: 55...75 kW, 200...240 V

Complementary

Motor cable length	<= 150 m (unshielded cable) motor: 110...160 kW 380...480 V, with 1 filter <= 150 m (shielded cable) motor: 110 kW 380...480 V, with 1 filter <= 300 m (shielded cable) motor: 130...160 kW 380...480 V, with 2 filter <= 500 m (unshielded cable) motor: 110...160 kW 380...480 V, with 2 filter <= 500 m (shielded cable) motor: 110 kW 380...480 V, with 1 filter + VW3A5506 <= 150 m (unshielded cable) motor: 55...75 kW 200...240 V, with 1 filter <= 150 m (shielded cable) motor: 55 kW 200...240 V, with 1 filter <= 300 m (shielded cable) motor: 75 kW 200...240 V, with 2 filter <= 500 m (unshielded cable) motor: 55...75 kW 200...240 V, with 2 filter <= 500 m (shielded cable) motor: 55 kW 200...240 V, with 1 filter + VW3A5506
Saturation current	3.6 A
Diameter	123.9 mm for 3-phase cable inside 123.9 mm for PE cable outside
Electrical insulation class	Class I
Mechanical robustness	Shocks conforming to IEC 60721-3-3 class 3M4 Vibrations conforming to IEC 60721-3-3 class 3M4
Switching frequency	<= 10 kHz
Output frequency	<= 100 Hz
Height	197 mm
Width	191 mm
Depth	196 mm
Product weight	6 kg


Environment

Relative humidity	5...95 % without condensation
Ambient air temperature for operation	-15...60 °C
Ambient air temperature for storage	-40...70 °C

Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 1532 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
------------------------	---

Dimensions

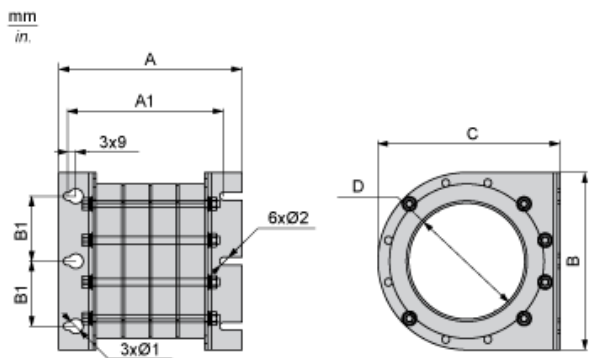


Dimensions in mm

A	A1	B1	Ø1	Ø2	B	C	D
197.2	167.8	70	16	8.5	191	196	123.9

Dimensions in in.


A	A1	B1	Ø1	Ø2	B	C	D
7.8	6.3	2.8	0.6	0.33	7.5	7.7	4.9

Mounting Recommendations

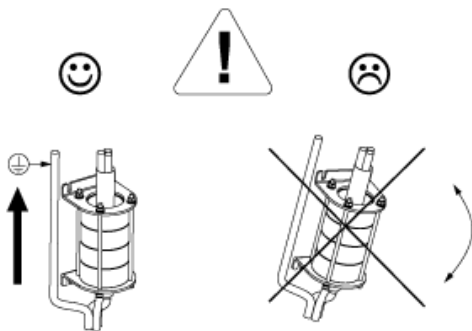


Recommended Schema

Connection at the Output Terminals of the Drive

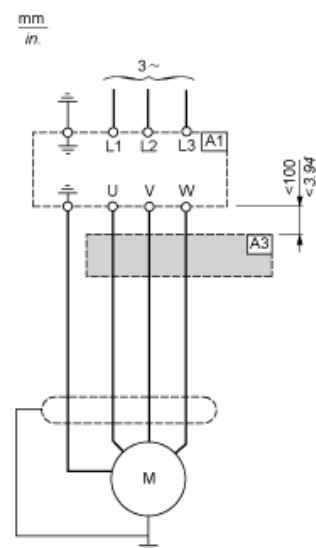

A1 : Drive
A3 : Common mode filter

Connection at the Output Terminals of the dv/dt Filter or Sinus Filter

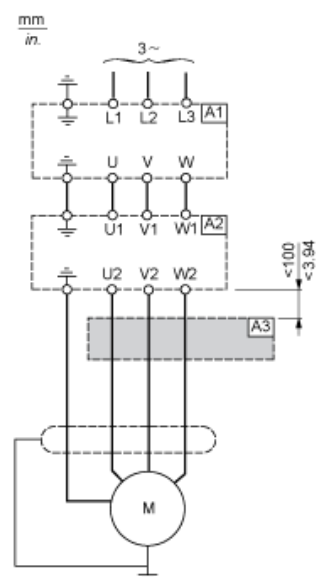

A1 : Drive
A2 : dv/dt or sinus filter
A3 : Common mode filter