

EcoStruxure Power Commission Installation Guide

07/2020

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein. If you have any suggestions for improvements or amendments or have found errors in this publication, please notify us.

You agree not to reproduce, other than for your own personal, noncommercial use, all or part of this document on any medium whatsoever without permission of Schneider Electric, given in writing. You also agree not to establish any hypertext links to this document or its content. Schneider Electric does not grant any right or license for the personal and noncommercial use of the document or its content, except for a non-exclusive license to consult it on an "as is" basis, at your own risk. All other rights are reserved.

All pertinent state, regional, and local safety regulations must be observed when installing and using this product. For reasons of safety and to help ensure compliance with documented system data, only the manufacturer should perform repairs to components.

When devices are used for applications with technical safety requirements, the relevant instructions must be followed.

Failure to use Schneider Electric software or approved software with our hardware products may result in injury, harm, or improper operating results.

Failure to observe this information can result in injury or equipment damage.

© 2020 Schneider Electric. All rights reserved.

Table of Contents



	Safety Information.	5
	About the Book.	7
Chapter 1	Installation Requirements.	9
	Prerequisites.	9
Chapter 2	Download and Installation.	11
	Downloading the EcoStruxure Power Commission Software.	12
	Installing the EcoStruxure Power Commission Software.	13
	Software Registration.	17
	EcoStruxure Power Commission Software Upgrade.	20



Important Information

NOTICE

Read these instructions carefully, and look at the equipment to become familiar with the device before trying to install, operate, service, or maintain it. The following special messages may appear throughout this documentation or on the equipment to warn of potential hazards or to call attention to information that clarifies or simplifies a procedure.



The addition of this symbol to a “Danger” or “Warning” safety label indicates that an electrical hazard exists which will result in personal injury if the instructions are not followed.



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

DANGER

DANGER indicates a hazardous situation which, if not avoided, **will result in** death or serious injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, **could result in** death or serious injury.

CAUTION

CAUTION indicates a hazardous situation which, if not avoided, **could result in** minor or moderate injury.

NOTICE

NOTICE is used to address practices not related to physical injury.

PLEASE NOTE

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has skills and knowledge related to the construction and operation of electrical equipment and its installation, and has received safety training to recognize and avoid the hazards involved.

About the Book



At a Glance

Document Scope

This document describes the installation of EcoStruxure Power Commission software.

Validity Note

This document is valid for EcoStruxure Power Commission software version 2.0 or later.

Chapter 1

Installation Requirements

Prerequisites

Hardware Requirements

Component	Minimum Requirements
Processor	Intel® Core™ 2 Duo CPU at 3.00 GHz
RAM	4 GB
System type	64 bit or 32 bit

Software Requirements

- Microsoft Windows® 8.1 operating system⁽¹⁾
- Microsoft Windows® 10 operating system
- Google Chrome™ web browser (version 79 or later)
- Modbus driver (version 2.20 IE30 for 32-bit and version 3.20 IE30 for 64-bit)
- Require at least 2 GB free space in the drive where EcoStruxure Power Commission will be installed

⁽¹⁾ Local connection with UTA is not supported on Windows 8.1.

Chapter 2

Download and Installation

What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
Downloading the EcoStruxure Power Commission Software	12
Installing the EcoStruxure Power Commission Software	13
Software Registration	17
EcoStruxure Power Commission Software Upgrade	20

Downloading the EcoStruxure Power Commission Software

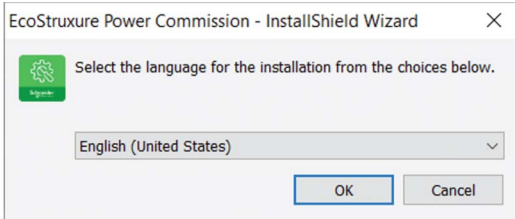
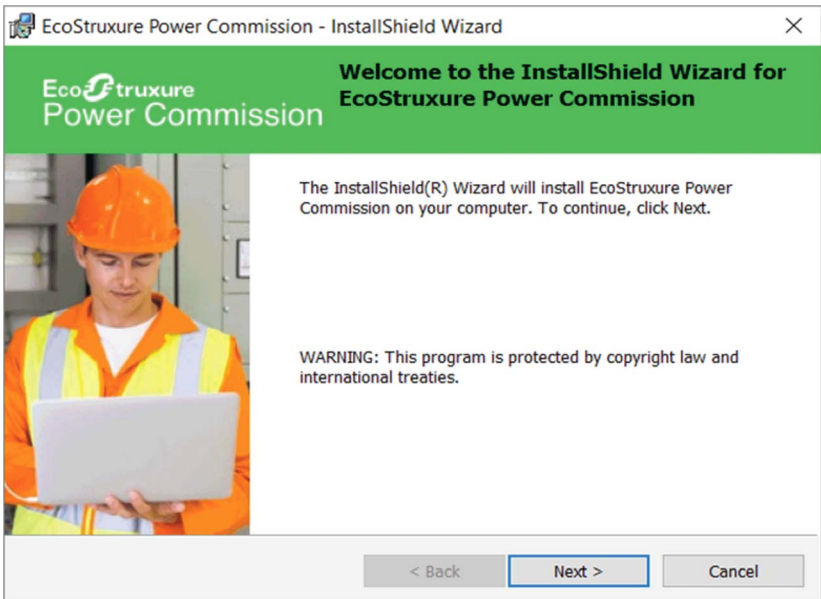
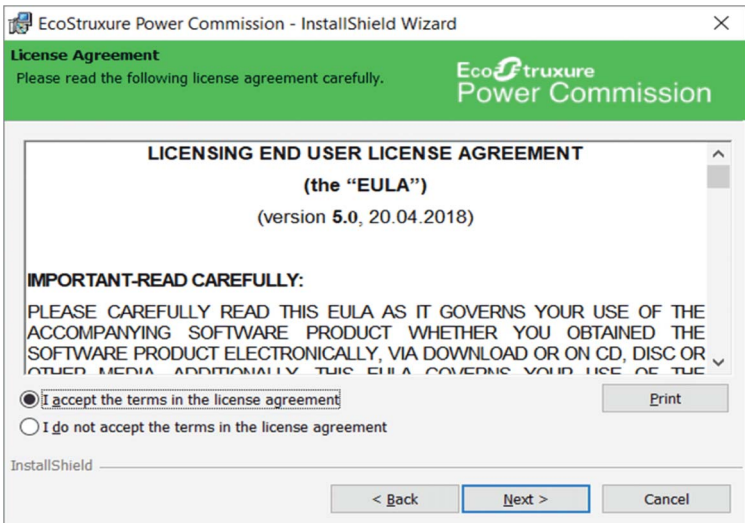
Procedure

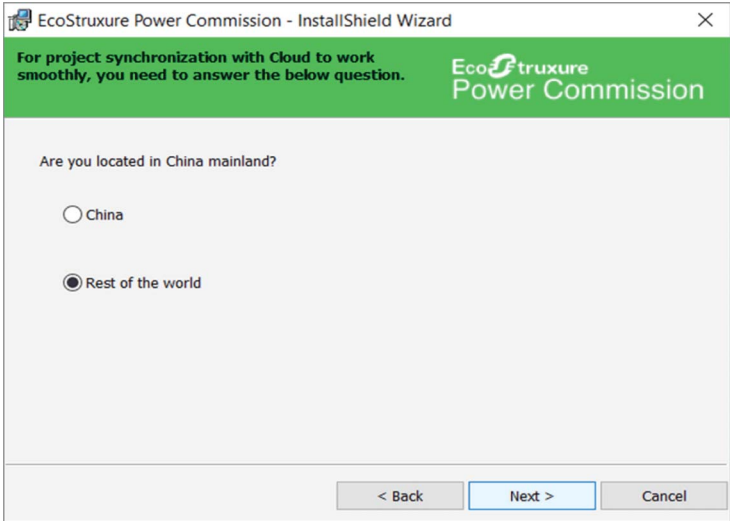
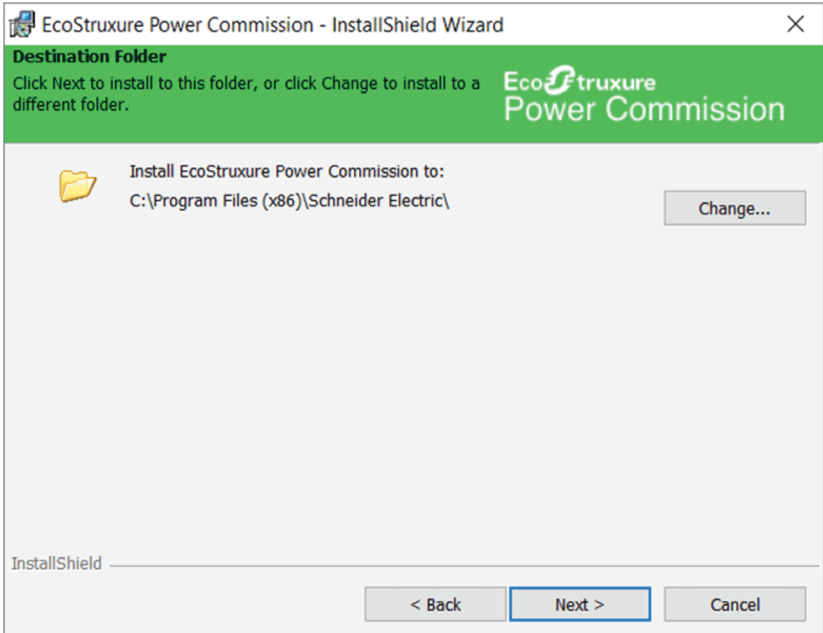
NOTE: The user should have administrator privilege on the PC to install EcoStruxure Power Commission™ software.

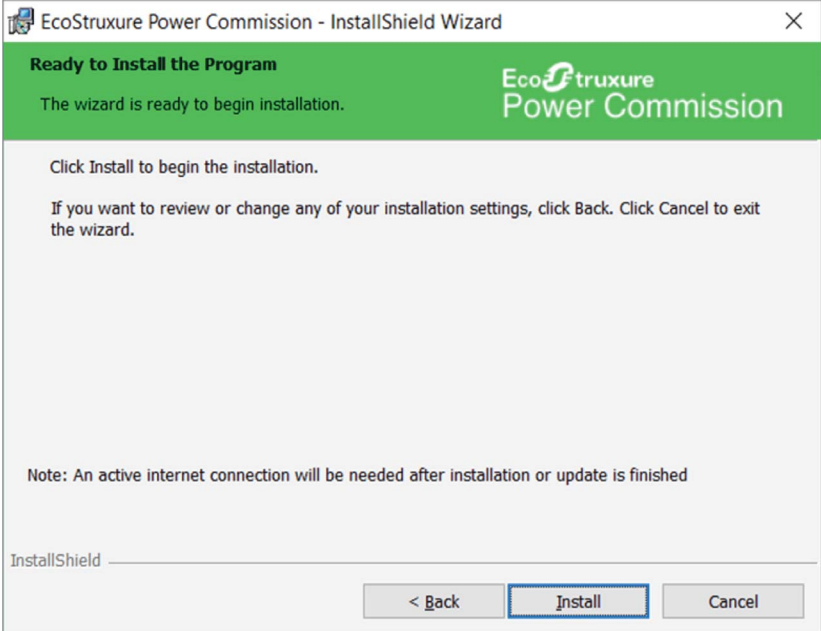
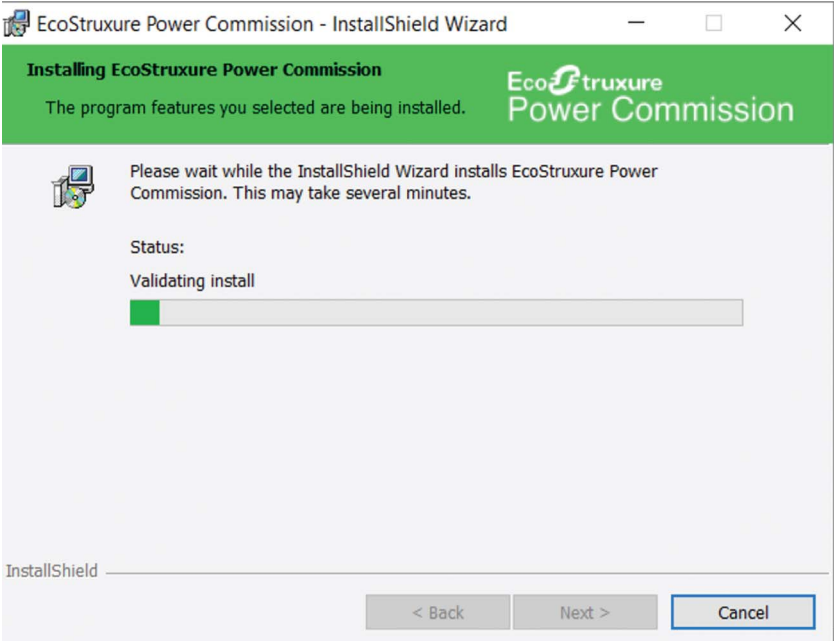
Step	Action
1	Go to the Schneider Electric website: www.schneider-electric.com or Schneider Electric country website.
2	In the Search box, type EcoStruxure Power Commission. Result: Displays a SUGGESTIONS list.
3	Select EcoStruxure Power Commission Installer from the SUGGESTIONS list.
4	Download the EcoStruxure Power Commission Installer.
5	Install the EcoStruxure Power Commission software (<i>see page 13</i>).

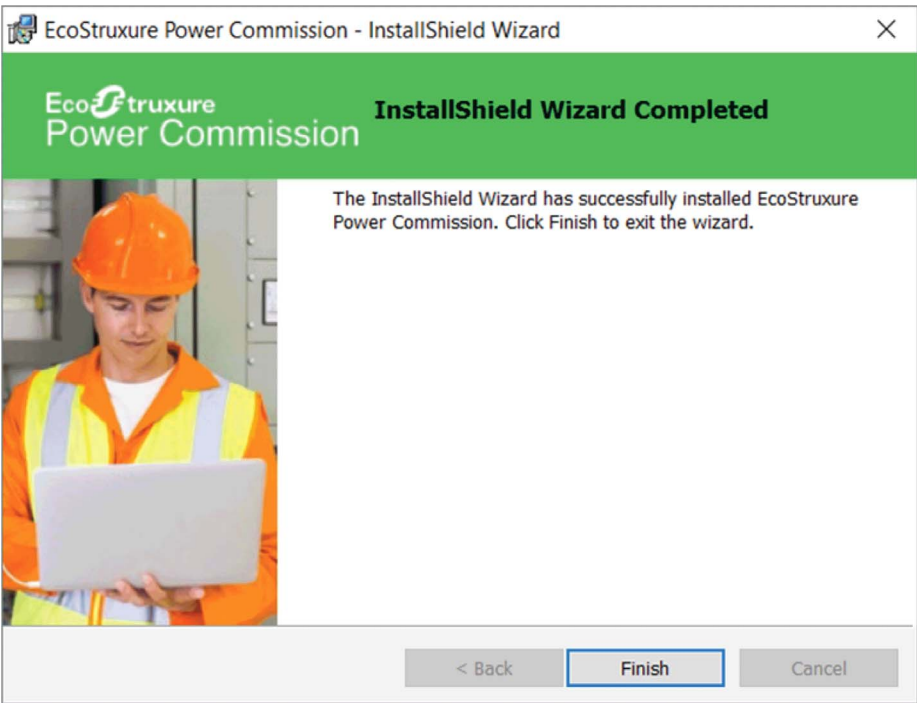
Installing the EcoStruxure Power Commission Software

Procedure

Step	Action
1	Double-click the EcoStruxure Power Commission setup file. Result: InstallShield Wizard is displayed. 
2	Select the required language for the installation, and click OK. Result: The installation starts, and the Welcome window is displayed. 
3	Click Next in the Welcome window. Result: The License Agreement window is displayed. 

Step	Action
4	Read the license agreement and accept the terms of the agreement selecting the appropriate option. Click Next. Result: The following window is displayed. 
5	If you are located in China Mainland, select Yes, otherwise select No and then click Next. Result: The Destination Folder window is displayed. 

Step	Action
6	Click Next in the Destination Folder window to save the installation file in the default folder mentioned. NOTE: If you want to change the default installation location, click Change. Result: The Ready to Install the Program window is displayed. 
7	Click Install in the Ready to Install the Program window. Result: • The Installing EcoStruxure Power Commission window is displayed with installation in progress. • After the installation is completed, the Installation Wizard Completed window is displayed. 

Step	Action
8	Click Finish to exit the installation. 

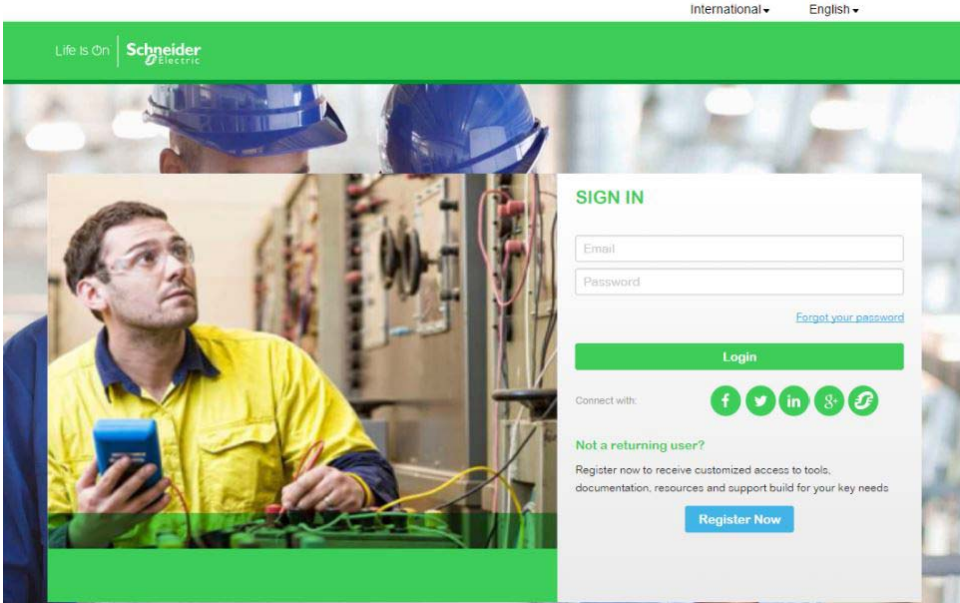
Software Registration

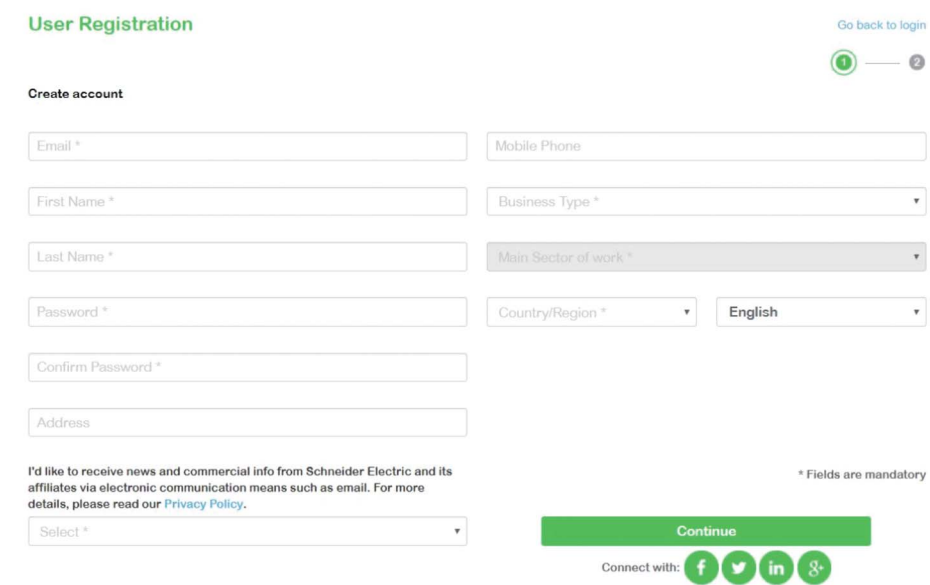
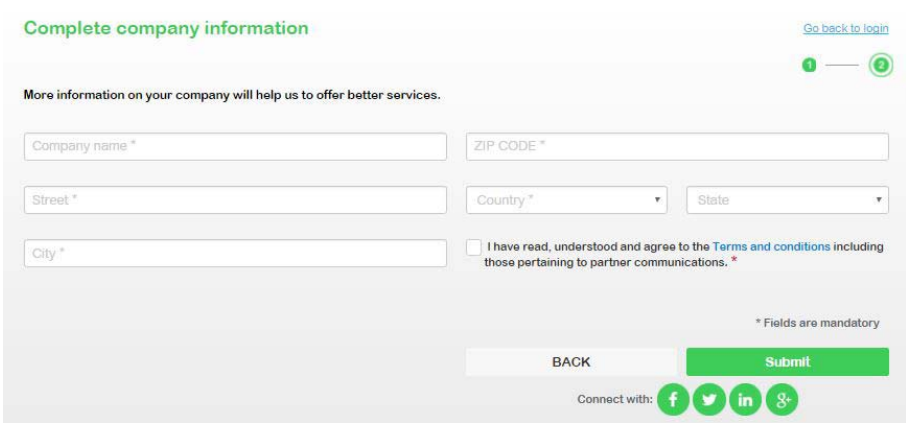
Steps for Registration

NOTE:

- The PC should have an Internet connection for the registration.
- Make sure that Google Chrome is installed on your computer.

When you start the EcoStruxure Power Commission for the first time, follow these steps.

Step	Action
1	Double-click the EcoStruxure Power Commission icon on the desktop to start the software. Or Click Start → EcoStruxure Power Commission. NOTE: In order to launch EcoStruxure Power Commission, your Windows user account needs to have administrator privileges. Result: The registration or login screen is displayed. 
2	You can register and log in through a social media account like Facebook, Twitter, LinkedIn, or Google+. NOTE: Only Schneider Electric employees can use  icon to directly log into EcoStruxure Power Commission.

Step	Action
3	For a new user, click Register Now. Result: The User Registration screen is displayed. 
4	Enter all the required details, and click Continue.
5	Enter the company information. 
6	Select the terms and conditions, and click Submit. Result: A validation email is sent to the registered email.
7	Open the registered email and check for the confirmation email sent from noreply@schneider-electric.com. NOTE: Sometimes Spam filters block automated emails. If you do not find the email in your inbox, check your Spam or Junk folder.

Step	Action
8	Click the link attached in the email to verify and complete your account setup. Result: The confirmation page displays that the account setup is successful.  SIGN IN Your mail has been verified Your account has been set up successfully, please login to have access to your application. Go back to login
9	Close the confirmation page.
10	Go to EcoStruxure Power Commission application, and click Go Back to login. Result: The login screen is displayed.
11	Enter the registered user name and password. NOTE: It is not recommended to log in with the same User ID from two different PCs/laptops.

EcoStruxure Power Commission Software Upgrade

Live Update Through Schneider Electric Software Update

The Schneider Electric Software Updates utility detects any new update for EcoStruxure Power Commission. Whenever there is an update available for the EcoStruxure Power Commission software, the notification area at the far right of the task bar displays the latest update information.

The notification guides the user to download and install the updated EcoStruxure Power Commission software version.

NOTE: Do not delete or uninstall the existing EcoStruxure Power Commission installation software before checking for updates. Schneider Electric Software Update utility takes care of updating your EcoStruxure Power Commission software seamlessly.

You can configure the notification frequency for EcoStruxure Power Commission update in Schneider Electric Software Update. To configure it, click **Start → All Programs → Schneider Electric → Software Update → Settings**.