



Schneider
Electric™

DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH


- Turn off all power supplying this device before working on it.
 - Use a voltage tester with a suitable rated voltage in order to check that all active conductors aren't energized.
- Failure to follow these instructions will result in death or serious injury.

2 Connection

NOTICE

INOPERABLE EQUIPMENT

- Do not bind the neutral cable for installation.
 - Install the neutral cable straight between the iC60H3 RCBO and the main neutral terminal block.
- Failure to follow these instructions can result in equipment damage.

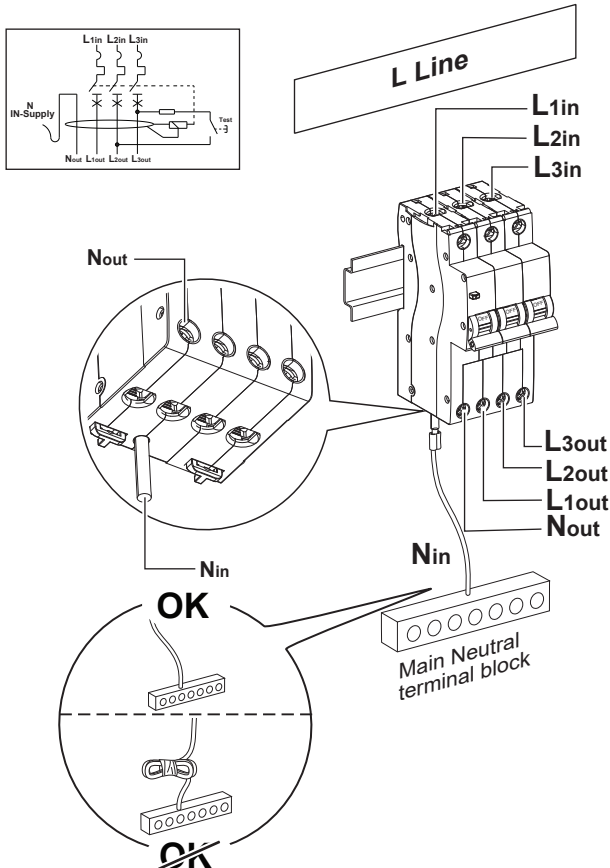


1 Installation

DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Install this product in accordance with National Wiring Regulation.
 - Check compatibility with earthing system. Do not use this product on installations which require double pole switching eg. IT or TT systems.
- Failure to follow these instructions will result in death or serious injury.

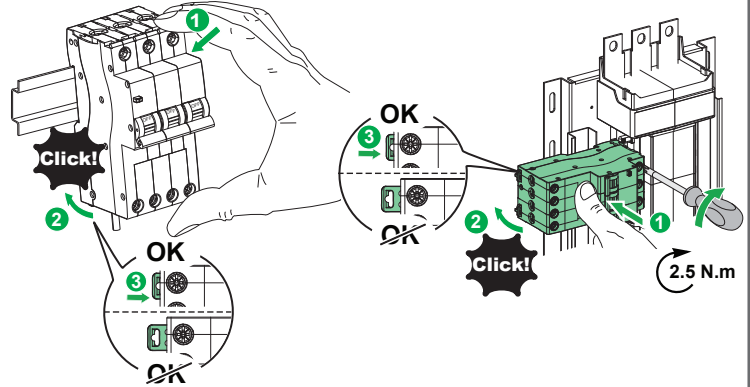

Note: As per Clause 9.12 of AS/NZS61009.1 the grid distance clearance from the arc vent must be at least 45mm.

Stripping length	Rigid cable	Flexible cable	Torque	Screw size
L _{in} ≤ 14 mm/ L _{out} ≤ 11 mm/ N _{out} ≤ 11 mm	L _{in} ≤ 25 mm²/ L _{out} ≤ 25 mm²/ N _{out} ≤ 25 mm²	L _{in} ≤ 16 mm²/ L _{out} ≤ 16 mm²/ N _{out} ≤ 16 mm²	2.5 N.m	PZ2


3 Testing

NOTICE

HAZARD OF IMPROPER OPERATION

- Do not use Test Button to switch OFF RCBO.
- Failure to follow the instruction can result in death, serious injury, or equipment damage.

Note: Test the device at regular intervals by pressing the Test button (marked T), following the intervals defined in your local regulations or monthly.

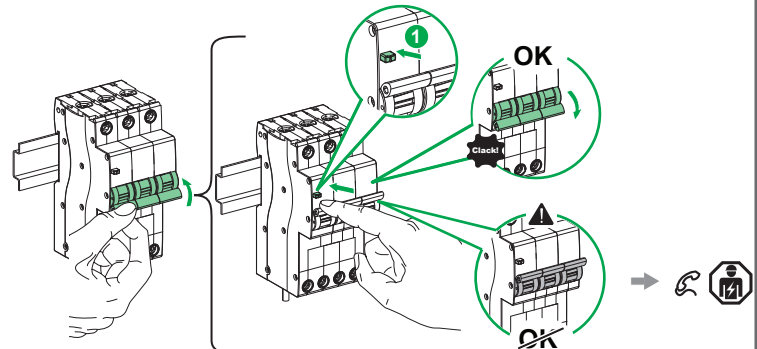


Periodic test:

In the absence of any regulation, Schneider Electric recommends the test should be carried out once a month.

Megger test:

iC60H3 RCBO must be disconnected before any dielectric tests are carried out.

4 More information...

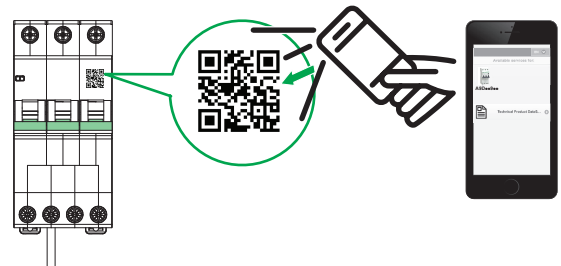

Note: Scan the QR code on product for more information.