


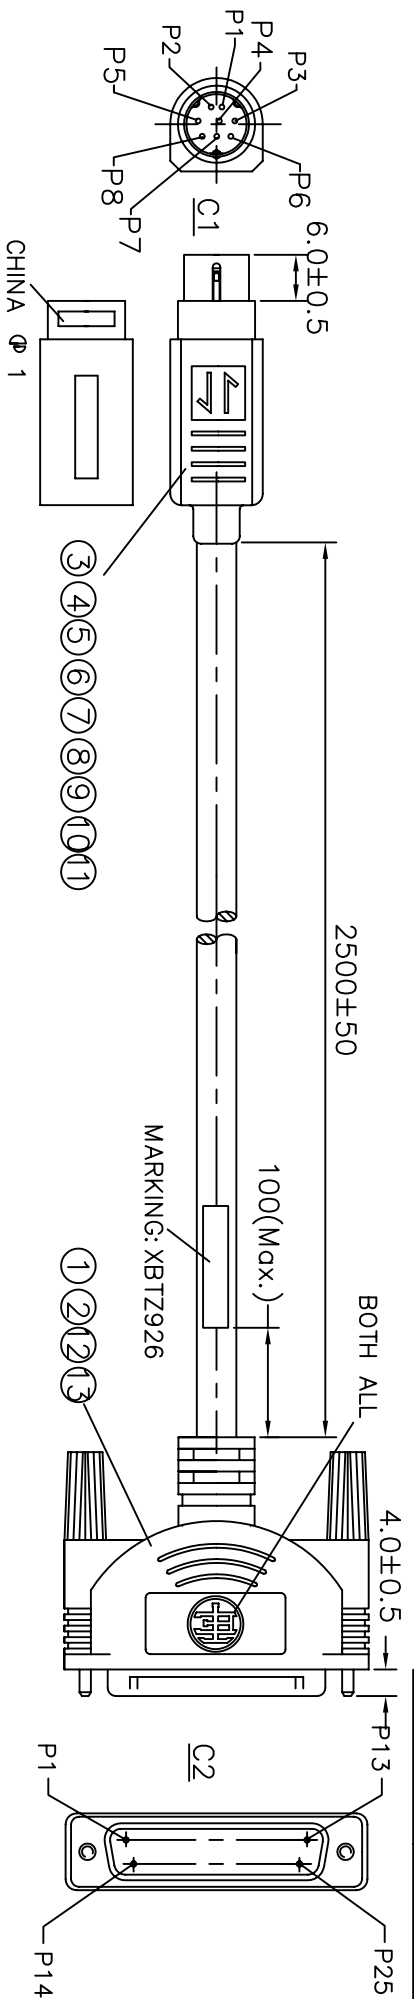


NOTE:

- 1.CABLE:[24AWG(7/0.203)x7C+D.W+AL/MY]TIN
INSULATION:SR-PVC,OD=ø1.15±0.05mm
COLOR:BLACK,BROWN,RED,ORANGE,YELLOW,GREEN,BLUE
JACKET:PVC,OD=ø5.5±0.15mm UL 2464
COLOR:BLACK(GLOSSY,SEMI-TUBE),
MARKING:"PAN-INTERNATION 2464 E87647-DG RJ
AWM 80° 300V VW-1SC"
OVERMOLD PVC: 3A30APIIOBLACK(SR),3A50AAP1IOBLACK(DB)
JACKET PVC: 3B70BPIIOBLACK
2. ELECTRIC TEST:
A.100%:OPEN,SHORT,MISWIRE
B.IR:DC300V/10ms/20Mohms.

WIRE LIST

C1	COLOR	C2
2	BLACK	2
3	BROWN	3
8	RED	4
7	ORANGE	5
4	YELLOW	6
6	GREEN	20
5	BLUE	7
SHELL	D.W	SHELL

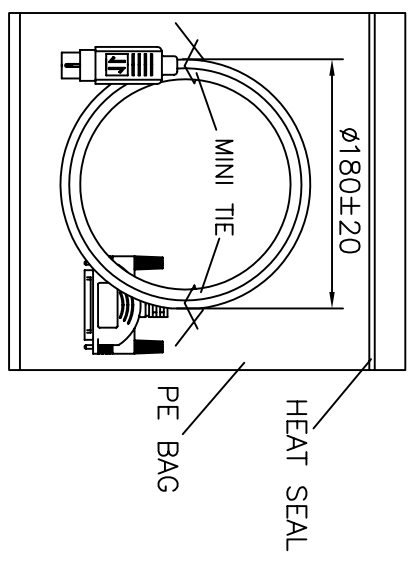

PACKAGING

						ACAD CODE:		P2436-04		
REV	DESCRIPTION	DATE	NAME	ECN NO.						
A	ISSUE	2016/04/01	Chen							
UNIT	MM	SCALE	NONE	SHEET	1					
				X XX XXX ANGLES		DRAW. BY		Chen		
						CHECKED				
						APPLY. BY				
NAME						SCHNEIDER XB7Z926				
DVG NO						PHK05-2004-0186				
						PAN-INTERNATIONAL INDUSTRIAL CORP.				
						TAIPEI, TAIWAN, R.O.C.				
NO.	DESCRIPTION	Q'TY	MATERIAL	PART NO.						
13	THUMB SCREW	2PCS	ABS+STEEL	A1030254						
12	OVERMOLD	1SET	50P PVC	4585FOA1						
11	LATCH	1PC	304STEEL	A1120002						
10	SR MOLD	1SET	PVC,30P	1882SR12						
9	TERMAINAL	8PCS	GOLD PLATED 30U	A2180007						
8	8P MD SOCKET	1PC	PBT	A7226011						
7	SLIDER	1PC	ABS	A3040294						
6	SPRING	1PC	301STEEL	A1190001						
5	CLAMP	1PC	BRASS	A1120004						
4	BACK COVER	1PC	BRASS	A1100024						
3	BARREL	1PC	BRASS	A1090016						
2	METAL CAN	1SET	STEEL	A1130194						
1	DB 25P M	1PCS	GOLD PLATED 30U	A7217041						

2500±50

100(Max.)

MARKING: XB7Z926

①②②③

BOTH ALL

4.0±0.5

P13

P25

C2

P14

P1

WIRE LIST

C1	COLOR	C2
2	BLACK	2
3	BROWN	3
8	RED	4
7	ORANGE	5
4	YELLOW	6
6	GREEN	20
5	BLUE	7
SHELL	D.W	SHELL